

Datasheet

[Get a Quote](#)

Overview

Huawei AR G3 AR200 Series AR207-S fixed interface access enterprise router provides routing and switching functionality for small business or branch offices. Huawei AR G3 AR207-S-S equips 1 ADSL2+ ANNEX A/M WAN, 8 FastEthernet LAN, 1 USB and provides total 150Mbps system capacity. Dual-core processor separate data and control planes to ensure the high performance. Robust security feature include build-in, comprehensive authentication, defense mechanisms and a broad range of VPN options.

Quick Specification

Model	AR207-S
Part Number	02353846
Memory	512 MB
Flash	512 MB
Service interfaces	WAN interface: one ADSL-A/M interface LAN interfaces: eight FE electrical interfaces, among which LAN interface FE0 can be used as a WAN interface
Micro SD card (default: sd1)	None
Hard disk	Not supported
Weight(kg)	2.8 kg (6.17 lb)
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)


Product Details:

The Front Panel:



①	USB interface (host)
---	----------------------

The Back Panel:

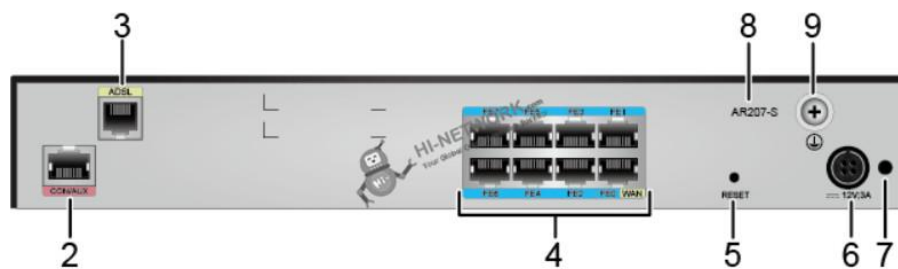

②	CON/AUX interface
③	WAN interface: ADSL-A/M interface
④	LAN interfaces: eight FE electrical interfaces
⑤	RST button
⑥	Power jack
⑦	Jack for power cable locking strap
⑧	Product model silkscreen
⑨	Ground point

Compare to Similar Items

Model	AR207-S	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)

Datasheet

Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm
------------------------	-------------------------------	-------------------------------

Get more information:

Do you have any question about the AR207-S 02353846?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02353846
Model	AR207-S
First Supported Version	V200R002C00
Memory Size	512 MB
Flash Memory	512 MB
Processor	Dual-core, 533 MHz
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Weight	2.8 kg (6.17 lb)
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	3 A
Maximum output power	36 W
RPS power supply	Not supported
PoE power supply	Not supported
Maximum power consumption	16.1 W
Fan module	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces	WAN interface: one ADSL-A/M interface LAN interfaces: eight FE electrical interfaces, among which LAN interface FE0 can be used as a WAN interface
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C (-40° F to +158° F)



Datasheet

Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

