

# Datasheet

[Get a Quote](#)

## Overview


Huawei S1730S-L8T-A is one of the Huawei S1730 unmanaged switches, with 8 10/100/1000BASE-T Ethernet ports and national standard AC adapter. The S1700 unmanaged switch is deployed at the access layer of an enterprise network to deliver cost-effective packet switching capability. It provides high quality data transmission for enterprises. The S1700 unmanaged switch helps enterprises construct reliable networks that have high scalability.

## Quick Specification

Model	S1730S-L8T-A
Part Number	98010873
PoE	Not supported
Weight (including packaging)	0.5 kg (1.10 lb)
Dimensions (H x W x D)	160mm×120mm×28mm

## Product Details:

### The Front Panel:

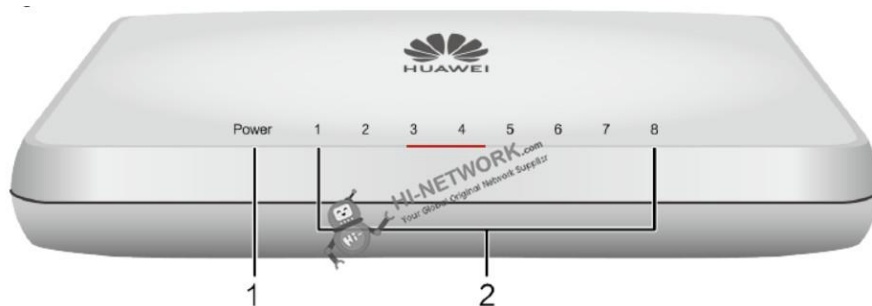


No.	Indicator	Name	Color	Status	Description
1	Power	Power indicator	-	Off	The switch is powered off.
			Green	Steady on	The switch is powered on.
2	1-8	Port indicator	-	Off	A port is not connected.

## Datasheet

			Green	Steady on	A port has set up a 10M, 100M, or 1000M connection.
			Green	Blinking	A port is transmitting data.

### The Back Panel:

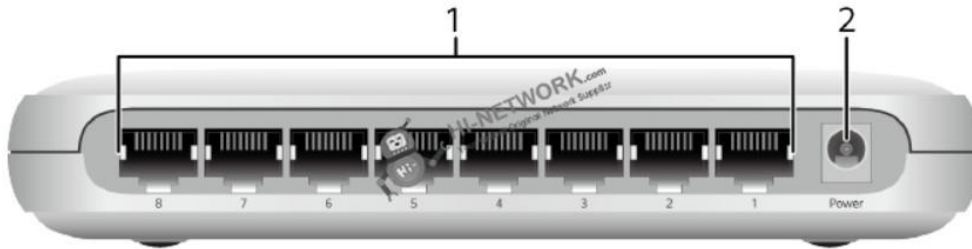

①	Eight 10/100/1000BASE-T ports
②	Power socket

### Compare to Similar Items

Model	<a href="#">S1730S-L4P4T-A</a>	<a href="#">S1730S-L8T-A</a>
Ports	8 10/100/1000BASE-T Ethernet ports	8 10/100/1000BASE-T ports
PoE	Supported	Not supported
Dimensions (H x W x D)	<ul style="list-style-type: none"> <li>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</li> <li>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</li> </ul>	160mm×120mm×28mm

Get more information:

Do you have any question about the S1730S-L8T-A 98010873?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010873
-------------	----------



## Datasheet

Model	S1730S-L8T-A
Dimensions (H x W x D)	160mm×120mm×28mm
Weight (including packaging)	0.5 kg (1.10 lb)
Service port surge protection	Common mode: ±7 kV
Power supply surge protection	±4 kV in differential mode, ±4 kV in common mode
PoE	Not supported
Rated voltage range	170 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	150 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	5 W
Typical power consumption (30% of traffic load)	2 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

