

[Get a Quote](#)

## Overview

S5735S-L48T4S-A1 is the Huawei S5735-L switch with 48 x 10/100/1000BASE-T ports, 4 x GE SFP ports, Distribution model. Huawei CloudEngine S5735-L is a series of simplified gigabit access switches that provide 12–48 flexible all-GE downlink ports and four fixed GE or 10 GE uplink ports. They are designed for enterprise campus network access and gigabit to the desktop. Built on next-generation, high-performance hardware and powered by Huawei's Versatile Routing Platform (VRP), CloudEngine S5735-L switches feature flexible Ethernet networking, diversified security control, and support for multiple Layer 3 routing protocols — providing higher performance and more powerful service processing capabilities for networks.

## Quick Specification

Table 1 shows the Quick Specification.


Model	S5735S-L48T4S-A1
Part Number	98011335
Description	S5735S-L48T4S-A1 (48*10/100/1000BASE-T ports, 4*GE SFP ports, AC power)
First supported version	V200R020C10
Memory	512 MB
Flash memory	512 MB
PoE	Not supported
Weight with packaging [kg(lb)]	4.31
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p>

Figure 1 shows the appearance of S5735S-L48T4S-A1.



## Product Details

Figure 2 shows the structure of S5735S-L48T4S-A1.

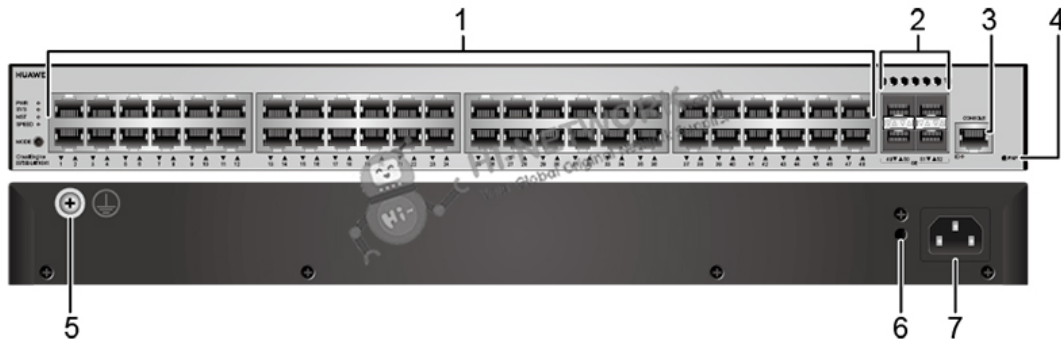

Note:

(1)	Forty-eight 10/100/1000BASE-T ports	(5)	Ground screw
(2)	Four 1000BASE-X ports	(6)	Jack for AC power cable locking strap
(3)	One console port	(7)	AC socket
(4)	One PNP button		

## Get More Information

Do you have any question about the S5735S-L48T4S-A1 (98011335)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

S5735S-L48T4S-A1 Specification	
Model	S5735S-L48T4S-A1
Part Number	98011335
Description	S5735S-L48T4S-A1 (48*10/100/1000BASE-T ports, 4*GE SFP ports, AC power)
First supported version	V200R020C10
Remarks	Some models cannot be downgraded due to component upgrade. Therefore, you are advised to run the display system-software information command (supported in V200R021C00 and later versions) to check the software versions supported by the device before performing a downgrade.
Dimensions without packaging (H x W x D) [mm(in.)]	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)

Dimensions with packaging (H x W x D) [mm(in.)]	90.0 mm x 550.0 mm x 360.0 mm (3.54 in. x 21.65 in. x 14.17 in.)
Chassis height [U]	1
Weight without packaging [kg(lb)]	2.76 kg (6.09 lb)
Weight with packaging [kg(lb)]	3.74 kg (8.25 lb)
Typical power consumption [W]	43.3
Typical heat dissipation [BTU/hour]	147.74
Maximum power consumption [W]	50.4
Maximum heat dissipation [BTU/hour]	171.97
MTBF [year]	56.7
MTTR [hour]	2
Availability	>0.99999
Noise at normal temperature (acoustic power) [dB(A)]	48
Noise at normal temperature (acoustic pressure) [dB(A)]	36.2
Number of card slots	0
Number of power slots	0
Number of fans modules	1
Redundant power supply	Not supported
Long-term operating temperature [°C(°F)]	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature [°C(°F)]	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Restriction on the operating temperature variation rate [°C(°F)]	<p>When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).</p> <p>The operating temperature ranges from -5°C to +45°C (23°F to 113°F) when optical modules with transmission distances greater than or equal to 70 km are used.</p> <p>The equipment can operate beyond the normal operating temperature range for a short-term period, but the following conditions must be met:</p> <ul style="list-style-type: none"> <li>- The equipment operates at a temperature of over 50°C (122°F) consecutively for at most 96 hours in one year.</li> <li>- The equipment operates at a temperature of over 50°C (122°F) for a total of no more than 360 hours in one year.</li> <li>- The equipment operates at a temperature of over 50°C (122°F) for no more in 15 times in one year.</li> </ul> <p>The equipment may be damaged or experience unexpected exceptions if any of the preceding limits is exceeded.</p> <p>The equipment cannot start when the temperature is lower than 0°C (32°F). The maximum distance of optical modules used in these conditions cannot exceed 10 km.</p>
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating relative humidity [RH]	5% to 95%, noncondensing
Long-term operating altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Storage altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Power supply mode	AC built-in

Rated input voltage [V]	AC input: 100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	AC input: 90 V AC to 264 V AC, 47 Hz to 63 Hz
Memory	512 MB
Flash memory	512 MB
Console port	RJ45
Eth Management port	Not supported
USB	Not supported
RTC	Not supported
RPS input	Not supported
Service port surge protection [kV]	Common mode: $\pm 7$ kV
Power supply surge protection [kV]	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
Types of fans	Built-in
Heat dissipation mode	Heat dissipation with fan, intelligent fan speed adjustment
Airflow direction	Air intake from left and front, air exhaustion from right
PoE	Not supported
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223