

Datasheet

[Get a Quote](#)

Overview

CloudEngine S6730-S series full-featured 10 GE switches are Huawei's new generation fixed switches ,to provide 10 GE downlink ports as well as 40 GE uplink ports. CloudEngine S6730-S can be used to provide high-speed access for 10 Gbit/s access to high-density servers or function as a core/aggregation switch on a campus network to provide 40 Gbit/s rate. In addition, CloudEngine S6730-S provides a wide variety of services, comprehensive security policies, and various QoS features to help customers build scalable, manageable, reliable, and secure campus and data center networks.

Quick Specification

Model	S6730S-S24X6Q-A
Part Number	02353AJX/02353AJX-001/02353AJX-003/02353AJX-004
Memory	4 GB
Flash memory	2 GB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight (with packaging)	9.84 kg (21.69 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 446.0 mm (1.72 in. x 17.4 in. x 17.6 in.)</p>

Difference between Part Number


Model	S6730S-S24X6Q-A			
Part Number	02353AJX	02353AJX-001	02353AJX-003	02353AJX-004
Heat dissipation mode	Heat dissipation with fan, intelligent fan speed adjustment	Heat dissipation with fan, intelligent fan speed adjustment	Air cooling for heat dissipation, intelligent fan speed adjustment	Air cooling for heat dissipation, intelligent fan speed adjustment
Maximum input current [A]	The current specifications depend on the pluggable power modules in use. For	The current specifications depend on the pluggable power modules in use. For	The current specifications depend on the pluggable power modules in use. For	The current specifications are related to the pluggable power module. For details, see

Datasheet


	details, see the related power module specifications.	details, see the related power module specifications.	details, see the related power module specifications.	Pluggable Power Modules.
Long-term operating temperature [°C(°F)]	-5° C to +45° C (23° F to 113° F) at an altitude of 0-1800 m (0-5906 ft.)	-5° C to +45° C (23° F to 113° F) at an altitude of 0-1800 m (0-5906 ft.)	-5° C to +45° C (23° F to 113° F) at an altitude of 0 to 1800 m (0 to 5905.51 ft.)	-5° C to +45° C (23° F to 113° F) at an altitude of 0 to 1800 m (0 to 5905.44 ft.)

Product Details:

The Front Panel:

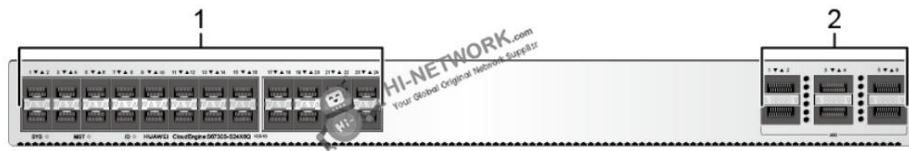

The Back Panel:

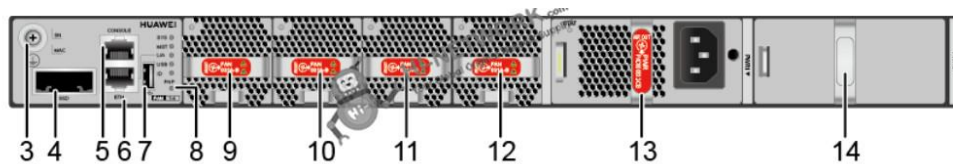

①	Twenty-four 10GE SFP+ ports
②	Six 40GE QSFP+ optical ports
③	Ground screw
④	SSD card slot
⑤	One console port
⑥	One ETH management port
⑦	One USB port
⑧	One PNP button
⑨	Fan module slot 1
⑩	Fan module slot 2
⑪	Fan module slot 3

Datasheet

⑫	Fan module slot 4
⑬	Power module slot 1
⑭	Power module slot 2

The Accessories for S6730S-S24X6Q-A

Recommended elements for the S6730-S Series

Models	Descriptions
eSFP-GE-SX-MM850	Optical Transceiver,eSFP,GE,Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver,eSFP,GE,Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver,eSFP,GE,Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,40km,LC)
S-SFP-GE-LH80-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,80km,LC)
eSFP-GE-ZX100-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,100km,LC)
SFP-GE-LX-SM1310-BIDI	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/RX1490,10km,LC)
SFP-GE-LX-SM1490-BIDI	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,10km,LC)
LE2MGSC40DE0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/RX1490,40km,LC)
LE2MGSC40ED0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,40km,LC)
SFP-GE-ZBXD1	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(1570nm(Tx)/1490nm(Rx),80km,LC)
SFP-GE-ZBXU1	Optical Transceiver,eSFP,GE,BiDi Single-mode Module(1490nm(Tx)/1570nm(Rx),80km,LC)
SFP-GE-BXU1-SC	1000Base,BIDI Optical Transceiver,SFP,GE,Single-mode Module(TX1490nm/RX1310nm,10km,SC)
CWDM-SFPGE-1471	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1471nm,80km,LC)
CWDM-SFPGE-1491	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1491nm,80km,LC)
CWDM-SFPGE-1511	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1511nm,80km,LC)
CWDM-SFPGE-1531	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1531nm,80km,LC)
CWDM-SFPGE-1551	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1551nm,80km,LC)
CWDM-SFPGE-1571	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1571nm,80km,LC)
CWDM-SFPGE-1591	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1591nm,80km,LC)
CWDM-SFPGE-1611	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1611nm,80km,LC)
DWDM-SFPGE-1560-61	DWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1560.61nm,120km,LC)
SFP-1000BaseT	Electrical Transceiver,SFP,GE,Electrical Interface Module(100m,RJ45)
SFP-10G-USR	10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.1km,LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)



Datasheet

SFP-10G-iLR	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,1.4km,LC)
OSX010000	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC)
OSX040N01	Optical Transceiver,SFP+,10G,Single-mode Module(1550nm,40km,LC)
SFP-10G-ER-1310	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,40km,LC)
SFP-10G-ZR	10GBase-ZR Optical Transceiver,SFP+,10G,Single-mode Module(1550nm,80km,LC)
SFP-10G-BXU1	10GBase,BIDI Optical Transceiver,SFP+,10G,Single-mode Module(TX1270nm/RX1330nm,10km,LC)
SFP-10G-BXD1	10GBase,BIDI Optical Transceiver,SFP+,10G,Single-mode Module(TX1330nm/RX1270nm,10km,LC)
SFP-10G-ER-SM1330-BIDI	Optical Transceiver,SFP+,10G,BIDI Single-mode Module(TX 1330nm/RX 1270nm,40km,LC)
SFP-10G-ER-SM1270-BIDI	Optical Transceiver,SFP+,10G,BIDI Single-mode Module(TX 1270nm/RX 1330nm,40km,LC)
SFP-10G-ZCW1471	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1471nm,70km,LC)
SFP-10G-ZCW1491	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1491nm,70km,LC)
SFP-10G-ZCW1511	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1511nm,70km,LC)
SFP-10G-ZCW1531	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1531nm,70km,LC)
SFP-10G-ZCW1551	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1551nm,70km,LC)
SFP-10G-ZCW1571	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1571nm,70km,LC)
SFP-10G-ZCW1591	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1591nm,70km,LC)
SFP-10G-ZCW1611	Optical Transceiver,SFP+,10G,Single-mode Module(CWDM,1611nm,70km,LC)
QSFP-40G-SR4	40GBase-SR4 Optical Transceiver,QSFP+,40G,Multi-mode (850nm,0.15km,MPO)
QSFP-40G-iSR4	40GBase-iSR4 Optical Transceiver,QSFP+,40G,Multi-mode (850nm,0.15km,MPO)(Connect to four SFP+ Optical Transceiver)
QSFP-40G-eSR4	40GBase-eSR4 Optical Transceiver,QSFP+,40G,Multi-mode (850nm,0.3km,MPO)(Connect to four SFP+ Optical Transceiver)
QSFP-40G-iSM4	40GBase-iSM4 Optical Transceiver,QSFP+,40G,Single-mode Module (1310nm,1.4km,MPO)(Connect to four SFP+ Optical Transceiver)
QSFP-40G-eSM4	40GBase-eSM4 Optical Transceiver,QSFP+,40G,Single-mode Module (1310nm,10km,MPO)(Connect to four SFP+ Optical Transceiver)

Get more information:

Do you have any question about the S6730S-S24X6Q-A 02353AJX/02353AJX-001/02353AJX-003/02353AJX-004?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02353AJX/02353AJX-001/02353AJX-003/02353AJX-004
Model	S6730S-S24X6Q-A
Memory (RAM)	4 GB
Flash	2 GB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	62.27 years
Mean time to repair (MTTR)	2 hours



Datasheet

Availability	> 0.99999
Service port surge protection	N/A
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 446.0 mm (1.72 in. x 17.4 in. x 17.6 in.)
Weight (with packaging)	9.84 kg (21.69 lb)
Stack ports	Any 10GE SFP+ ports (a maximum of 16 physical ports) Any 40GE QSFP+ ports (a maximum of 6 physical ports)
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	AC input: 100 V AC to 240 V AC, 50/60 Hz High-Voltage DC input: 240 V DC DC input: -48 V DC to -60 V DC
Maximum voltage range	AC input: 90 V AC to 290 V AC, 45 Hz to 65 Hz High-Voltage DC input: 190 V DC to 290 V DC DC input: -38.4 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	249 W
Typical power consumption (30% of traffic load, tested according to ATIS standard)	135 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 65 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)



Datasheet



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

