

Datasheet

[Get a Quote](#)

Overview

HUAWEI S2700-52P-EI-AC is the new generation layer 2 intelligence switch. It integrates 48 Fast Ethernet ports with 4 Gigabit Ethernet SFP uplink ports. HUAWEI S2700 uses iStack technology to virtualize multiple switches into a single one to ease user management and configuration and expand the system switching capacity. By utilizing stack features enhances reliability and scalability, moreover, this greatly reduces system operation and maintenance costs.

Quick Specification

Model	S2700-52P-EI-AC
Part Number	02352333
Memory (RAM)	128 MB
Flash	16 MB
PoE	Not supported
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)
Weight	≤ 3.5 kg (7.72 lb)

Product Details:

The Front Panel:




①	Forty-eight 10/100BASE-TX ports
②	Two 1000BASE-X ports
③	Two 100/1000BASE-X ports

Datasheet

④	One console port
---	------------------

The Back Panel:

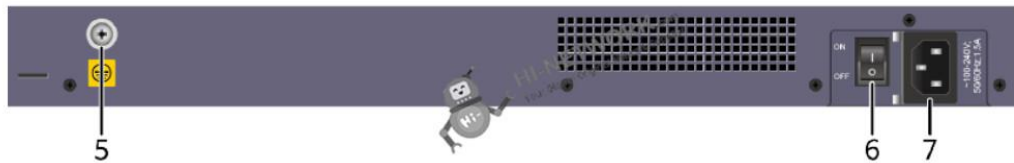

⑤	Ground screw
⑥	Power switch
⑦	AC socket

The Accessories for S2700-52P-EI-AC

Recommended optical transceivers

Models	Descriptions
FE-SFP Optical Transceiver	
SFP-FE-SX-MM1310	Optical Transceiver,SFP,100M/155M,Multi-mode Module(1310nm,2km,LC)
eSFP-FE-LX-SM1310	Optical Transceiver,eSFP,100M/155M,Single-mode Module(1310nm,15km,LC)
S-SFP-FE-LH40-SM1310	Optical Transceiver, eSFP, FE, Single-mode Module(1310nm,40km,LC)
GE-SFP Optical Transceiver	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45)
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)

Compare to Similar Items

Models	S2700-52P-EI-AC	S2700-52P-PWR-EI
Downlink Ports	48 Ethernet 10/100 ports	48 Ethernet 10/100 ports



Datasheet

Uplink Ports	4 Gb SFP	4 Gb SFP
Power Supply	AC	AC
PoE Support	None	PoE+

Get more information:

Do you have any question about the S2700-52P-EI-AC 02352333?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02352333
Model	S2700-52P-EI-AC
Memory (RAM)	128 MB
Flash	16 MB
Mean time between failures (MTBF)	26.8 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)
Weight	≤ 3.5 kg (7.72 lb)
Stack ports	Two 1000BASE-X ports
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	38 W
Operating temperature	-5°C to +50°C (23°F to 122°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Silent
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-2000 m (0-6562 ft.)
Certification	EMC certification Safety certification Manufacturing certification



Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223