

[Get a Quote](#)

Overview


EH1D2X40SFC0 provides forty 1000M/10GE BASE-X optical ports for data transmission and switching. It performs concurrent data forwarding using a distributed data plane.

Quick Specification

Table 1 shows the quick specification.

Model	EH1D2X40SFC0
Part Number	03030NXM
Description	40-port 10GBASE-X interface card (FC, SFP+)
Level-1 category	Interface card
Dimensions (H x W x D) [mm(in.)]	394.7 mm x 426.8 mm x 35.1 mm (15.5 in. x 16.8 in. x 1.4 in.)
Weight [kg(lb)]	2.90 kg (6.39 lb)
Maximum power consumption [W]	183 W
Environmental Parameters	Operating temperature: 0°C to 45°C (32°F to 113°F) Operating relative humidity: 5% RH to 95% RH (noncondensing) Storage temperature: -40°C to +70°C (-40°F to +158°F) Storage relative humidity: 5% RH to 95% RH (noncondensing)

Figure 1 shows the appearance of EH1D2X40SFC0.

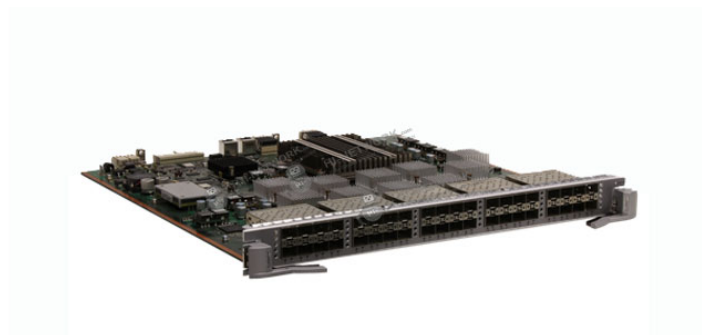

Get More Information

Do you have any question about the EH1D2X40SFC0 (03030NXM)?

Contact us now via info@hi-network.com.

Specification

EH1D2X40SFC0 Specification	
Basic Information	
Model	EH1D2X40SFC0
Part Number	03030NXM
Description	40-port 10GBASE-X interface card (FC, SFP+)
Level-1 category	Interface card
Technical Specifications	
Dimensions (H x W x D) [mm(in.)]	394.7 mm x 426.8 mm x 35.1 mm (15.5 in. x 16.8 in. x 1.4 in.)
Weight [kg(lb)]	2.90 kg (6.39 lb)
Maximum power consumption [W]	183 W
Environmental Parameters	Operating temperature: 0°C to 45°C (32°F to 113°F) Operating relative humidity: 5% RH to 95% RH (noncondensing) Storage temperature: -40°C to +70°C (-40°F to +158°F) Storage relative humidity: 5% RH to 95% RH (noncondensing)

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223