

[Get a Quote](#)

Overview

Cisco Wireless LAN Controllers work in conjunction with Cisco Aironet access points and the Cisco Wireless Control System (WCS) to provide systemwide wireless LAN functions. As a component of the Cisco Unified Wireless Network, the Cisco 2100 Series enables administrators to securely manage WLANs and mobility services, such as enhanced security, voice, guest access, and location services.

Cisco 2100 Series Wireless LAN Controllers supports up to 6, 12, or 25 access points and up to 256 clients, making it a cost-effective solution for retail, enterprise branches, and small and medium-sized businesses. These controllers come with eight Ethernet ports, two of which can provide power directly to Cisco lightweight access points.

Quick Specification

Figure 1 shows the appearance of AIR-WLC2112-K9.

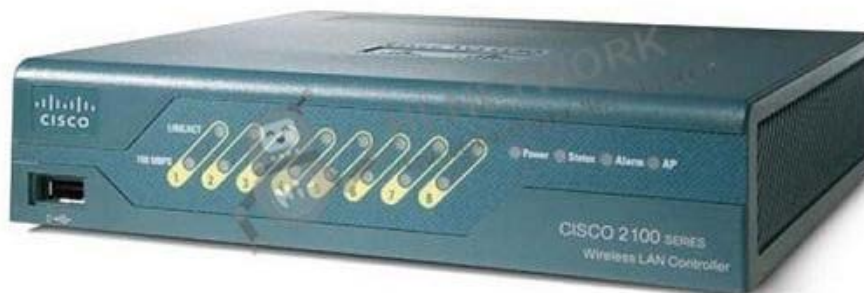


Table 1 shows the Quick Specification.

Model	AIR-WLC2112-K9
Wireless Standards	IEEE 802.11a, 802.11b, 802.11g, 802.11d, 802.11h, 802.11n
Wired/Switching/Routing	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX specification, and IEEE 802.1Q VLAN tagging
Data RFCs	<ul style="list-style-type: none"> • RFC 768 UDP • RFC 791 IP • RFC 792 ICMP • RFC 793 TCP • RFC 826 ARP • RFC 1122 Requirements for Internet Hosts • RFC 1519 CIDR • RFC 1542 BOOTP • RFC 2131 DHCP
Security Standards	<ul style="list-style-type: none"> • Wi-Fi Protected Access (WPA) • IEEE 802.11i (WPA2, RSN) • RFC 1321 MD5 Message-Digest Algorithm

	<ul style="list-style-type: none"> • RFC 2104 HMAC: Keyed Hashing for Message Authentication • RFC 2246 TLS Protocol Version 1.0 • RFC 3280 X.509 PKI Certificate and CRL Profile
Encryption	<ul style="list-style-type: none"> • WEP and Temporal Key Integrity Protocol-Message Integrity Check (TKIP-MIC): RC4 40, 104 and 128 bits (both static and shared keys) • Secure Sockets Layer (SSL) and Transport Layer Security (TLS): RC4 128-bit and RSA 1024- and 2048-bit • Advanced Encryption Standard (AES): CCM, Counter Mode with Cipher Block Chaining Message Authentication Code Protocol (CCMP)
Authentication, Authorization, and Accounting (AAA)	<ul style="list-style-type: none"> • IEEE 802.1X • RFC 2548 Microsoft Vendor-Specific RADIUS Attributes • RFC 2716 PPP EAP-TLS • RFC 2865 RADIUS Authentication • RFC 2866 RADIUS Accounting • RFC 2867 RADIUS Tunnel Accounting • RFC 2869 RADIUS Extensions • RFC 3576 Dynamic Authorization Extensions to RADIUS • RFC 3579 RADIUS Support for EAP • RFC 3580 IEEE 802.1X RADIUS Guidelines • RFC 3748 Extensible Authentication Protocol • Web-based authentication
Management	<ul style="list-style-type: none"> • SNMP v1, v2c, v3 • RFC 854 Telnet • RFC 1155 Management Information for TCP/IP-Based Internets • RFC 1156 MIB • RFC 1157 SNMP • RFC 1213 SNMP MIB II • RFC 1350 TFTP • RFC 1643 Ethernet MIB • RFC 2030 Sntp • RFC 2616 HTTP • RFC 2665 Ethernet-Like Interface types MIB • RFC 2674 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering, and Virtual LAN Extensions • RFC 2819 RMON MIB • RFC 2863 Interfaces Group MIB • RFC 3164 Syslog • RFC 3414 User-Based Security Model (USM) for SNMPv3 • RFC 3418 MIB for SNMP • RFC 3636 Definitions of Managed Objects for IEEE 802.3 MAUs • Cisco private MIBs
Management Interfaces	<ul style="list-style-type: none"> • Designed for use with Cisco Wireless Control System • Web-based: HTTP/HTTPS individual device manager • Command-line interface: Telnet, SSH, serial port
Interfaces and Indicators	<ul style="list-style-type: none"> • Console port: RS-232 (DB-9 male/RJ-45 connector included) • Network: Eight 10/100 Mbps Ethernet (RJ-45) including two 802.3af or Cisco PoE ports rated for use with Cisco Aironet lightweight access points

	<ul style="list-style-type: none"> • LED indicators: Link Activity (each 10/100 port), Power, Status, Alarm, Access Point Joined
Physical and Environmental	<ul style="list-style-type: none"> • Dimensions: 1.75 x 7.89 x 6.87 in. (4.45 x 20.04 x 17.45 cm) • Weight: 4.0 lbs (with power supply) • Temperature: <ul style="list-style-type: none"> • Operating: 32 to 104°F (0 to 40°C) • Storage: -13 to 158°F (-25 to 70°C) • Humidity: <ul style="list-style-type: none"> • Operating humidity: 10 to 95 percent, noncondensing • Storage humidity: Up to 95 percent • Power adapter: Input power: 100 to 240 V AC; 50/60 Hz • Heat Dissipation: 72 BTU/hour
Regulatory Compliance	<ul style="list-style-type: none"> • CE Mark • Safety: <ul style="list-style-type: none"> • UL 60950-1:2003 • EN 60950:2000 • EMI and susceptibility (Class B): <ul style="list-style-type: none"> • U.S.: FCC Part 15.107 and 15.109 • Canada: ICES-003 • Japan: VCCI • Europe: EN 55022, EN 55024

Get More Information

Do you have any question about the AIR-WLC2112-K9?

Contact us now via info@hi-network.com.

Specification

AIR-WLC2112-K9 Specification	
Wireless Standards	IEEE 802.11a, 802.11b, 802.11g, 802.11d, 802.11h, 802.11n
Wired/Switching/Routing	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX specification, and IEEE 802.1Q VLAN tagging
Data RFCs	<ul style="list-style-type: none"> • RFC 768 UDP • RFC 791 IP • RFC 792 ICMP • RFC 793 TCP • RFC 826 ARP • RFC 1122 Requirements for Internet Hosts • RFC 1519 CIDR • RFC 1542 BOOTP • RFC 2131 DHCP
Security Standards	<ul style="list-style-type: none"> • Wi-Fi Protected Access (WPA)

	<ul style="list-style-type: none"> • IEEE 802.11i (WPA2, RSN) • RFC 1321 MD5 Message-Digest Algorithm • RFC 2104 HMAC: Keyed Hashing for Message Authentication • RFC 2246 TLS Protocol Version 1.0 • RFC 3280 X.509 PKI Certificate and CRL Profile
Encryption	<ul style="list-style-type: none"> • WEP and Temporal Key Integrity Protocol-Message Integrity Check (TKIP-MIC): RC4 40, 104 and 128 bits (both static and shared keys) • Secure Sockets Layer (SSL) and Transport Layer Security (TLS): RC4 128-bit and RSA 1024- and 2048-bit • Advanced Encryption Standard (AES): CCM, Counter Mode with Cipher Block Chaining Message Authentication Code Protocol (CCMP)
Authentication, Authorization, and Accounting (AAA)	<ul style="list-style-type: none"> • IEEE 802.1X • RFC 2548 Microsoft Vendor-Specific RADIUS Attributes • RFC 2716 PPP EAP-TLS • RFC 2865 RADIUS Authentication • RFC 2866 RADIUS Accounting • RFC 2867 RADIUS Tunnel Accounting • RFC 2869 RADIUS Extensions • RFC 3576 Dynamic Authorization Extensions to RADIUS • RFC 3579 RADIUS Support for EAP • RFC 3580 IEEE 802.1X RADIUS Guidelines • RFC 3748 Extensible Authentication Protocol • Web-based authentication
Management	<ul style="list-style-type: none"> • SNMP v1, v2c, v3 • RFC 854 Telnet • RFC 1155 Management Information for TCP/IP-Based Internets • RFC 1156 MIB • RFC 1157 SNMP • RFC 1213 SNMP MIB II • RFC 1350 TFTP • RFC 1643 Ethernet MIB • RFC 2030 SNTP • RFC 2616 HTTP • RFC 2665 Ethernet-Like Interface types MIB • RFC 2674 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering, and Virtual LAN Extensions • RFC 2819 RMON MIB • RFC 2863 Interfaces Group MIB • RFC 3164 Syslog • RFC 3414 User-Based Security Model (USM) for SNMPv3 • RFC 3418 MIB for SNMP • RFC 3636 Definitions of Managed Objects for IEEE 802.3 MAUs • Cisco private MIBs
Management Interfaces	<ul style="list-style-type: none"> • Designed for use with Cisco Wireless Control System • Web-based: HTTP/HTTPS individual device manager • Command-line interface: Telnet, SSH, serial port
Interfaces and Indicators	<ul style="list-style-type: none"> • Console port: RS-232 (DB-9 male/RJ-45 connector included)

	<ul style="list-style-type: none"> • Network: Eight 10/100 Mbps Ethernet (RJ-45) including two 802.3af or Cisco PoE ports rated for use with Cisco Aironet lightweight access points • LED indicators: Link Activity (each 10/100 port), Power, Status, Alarm, Access Point Joined
<p>Physical and Environmental</p>	<ul style="list-style-type: none"> • Dimensions: 1.75 x 7.89 x 6.87 in. (4.45 x 20.04 x 17.45 cm) • Weight: 4.0 lbs (with power supply) • Temperature: <ul style="list-style-type: none"> • Operating: 32 to 104°F (0 to 40°C) • Storage: -13 to 158°F (-25 to 70°C) • Humidity: <ul style="list-style-type: none"> • Operating humidity: 10 to 95 percent, noncondensing • Storage humidity: Up to 95 percent • Power adapter: Input power: 100 to 240 V AC; 50/60 Hz • Heat Dissipation: 72 BTU/hour
<p>Regulatory Compliance</p>	<ul style="list-style-type: none"> • CE Mark • Safety: <ul style="list-style-type: none"> • UL 60950-1:2003 • EN 60950:2000 • EMI and susceptibility (Class B): <ul style="list-style-type: none"> • U.S.: FCC Part 15.107 and 15.109 • Canada: ICES-003 • Japan: VCCI • Europe: EN 55022, EN 55024

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223