

Overview


The Cisco C1300-16T-2G is a robust and efficient network switch designed to meet the demands of modern business environments. Equipped with 16x 10/100/1000 ports, this switch facilitates high-speed data transfer and supports a wide range of network devices. Ideal for both small and medium-sized enterprises, the Cisco C1300-16T-2G offers seamless integration, superior performance, and reliable connectivity to bolster your network infrastructure.

Quick Specification

Table 1 shows the quick specification.

Model	C1300-16T-2G
Dimension	268 x 272 x 44 mm (10.56 x 10.69 x 1.73 in)
Weight	2.18 kg (4.80 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Ports	16x 10/100/1000 ports
Combo Ports	2x Gigabit SFP
Form Factor	Fixed Configuration

Figure 1 shows the appearance of C1300-16T-2G.

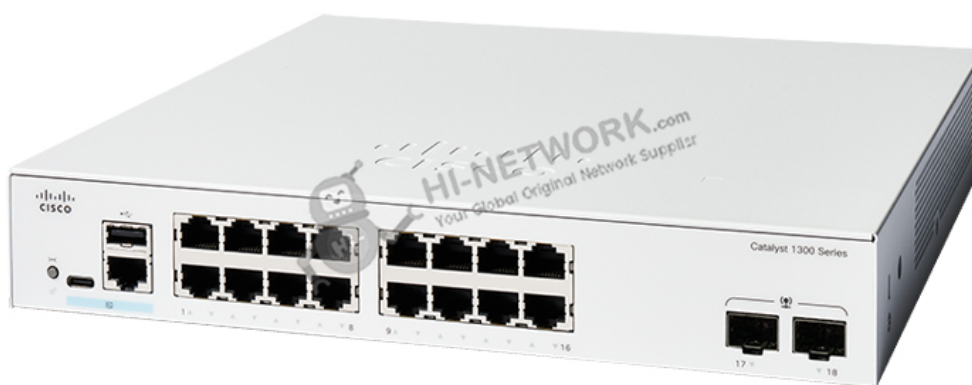



Product Details

Product Features

- 16 Gigabit Ethernet ports.
- Enhanced security features including port security and access control lists.
- QoS (Quality of Service) management for optimized traffic handling.
- Energy Efficient Ethernet for reduced power consumption.
- Compact 1U rack-mount design, saving physical space in your setup.

Product Applications

- Used in small to medium-sized business networks to connect computers, printers, and servers.
- Ideal for network expansions in office environments where reliable and fast connectivity is required.
- Suitable for deploying VoIP phones and wireless access points, ensuring smooth communication and data transfer.

Supported Options

Accessory	Model
Rack Mount Kit	C-RMK-1U
Power Supply	C-PS-1300W
Stacking Module	C-SM-16

Compare to Similar Items

Model	Differences
Cisco C1200-12P-2X	12 ports, PoE+ support, 2 SFP+ uplinks
Cisco C1400-24T-4G	24 ports, higher port density, 4 Gigabit uplinks
Cisco C1500-8P-2X	8 ports, PoE support, 2 SFP+ uplinks

Get More Information

Do you have any questions about the C1300-16T-2G?

Contact us now via info@hi-network.com.





Specification

C1300-16T-2G Datasheet	
Ports	16x 10/100/1000 ports
Combo Ports	2x Gigabit SFP
Mounting	Rack-mountable
Forwarding Rate	26.78 Mpps
Switching Capacity	36.0 Gbps
Power	100-240V 50-60 Hz, internal, universal
Dimension	268 x 272 x 44 mm (10.56 x 10.69 x 1.73 in)
Weight	2.18 kg (4.80 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Console port	Cisco standard RJ-45 console port and USB Type C port
USB port	USB Type C port on the front panel of the switch for easy file and image management as well as console port
Buttons	Reset button
Cabling type	Unshielded Twisted Pair (UTP) Category 5e or better for 1000BASE-T
LEDs	System, Link/Act, PoE, Speed
Flash	512 MB
CPU	ARM dual-core at 1.4 GHz
DRAM	1 GB DDR4
Certifications	UL (UL 62368), CSA (CSA 22.2), CE mark, FCC Part 15 (CFR 47) Class A

Want to Buy

Get a Quote

[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

