

Overview


The Cisco C1300-8FP-2G is a robust network switch designed to enhance your network infrastructure with exceptional power and flexibility. Featuring 8x 10/100/1000 PoE+ ports that deliver a combined power budget of 120W, this switch also includes 2x Gigabit copper/SFP combo ports. It is an ideal solution for businesses seeking reliable and efficient Power over Ethernet (PoE) capabilities to support various devices such as IP cameras, VoIP phones, and wireless access points.

Quick Specification

Table 1 shows the quick specification.

Model	C1300-8FP-2G
Dimension	268 x 272 x 44 mm (10.56 x 10.71 x 1.73 in)
Weight	3.05 kg (6.72 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Ports	8x 10/100/1000 PoE+ ports with 120W power budget
Combo Ports	2x Gigabit copper/SFP combo ports
Form Factor	Fixed Configuration

Figure 1 shows the appearance of C1300-8FP-2G.

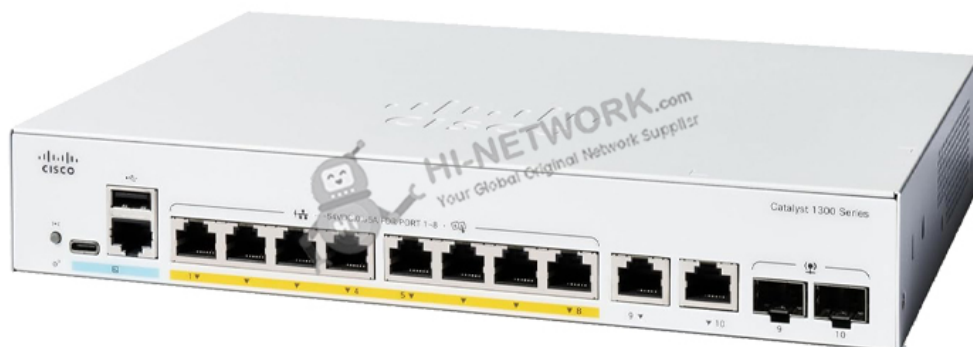

Product Details

Product Features

- Supports 8x 10/100/1000 Mbps PoE+ ports with a 120W power budget
- Includes 2x Gigabit copper/SFP combo uplink ports for flexible connectivity options
- Advanced security features to safeguard network integrity
- Energy-efficient design with advanced power management capabilities
- Compact and fanless design, ensuring quiet operation

Product Applications

- Ideal for small to medium-sized businesses requiring efficient PoE functionality for IP cameras and VoIP phones
- Perfect for educational institutions needing dependable network connectivity for administrative and classroom devices
- Suitable for retail environments to support point-of-sale systems and wireless access points

Supported Options

Accessory	Model
SFP Module	GLC-LH-SMD
SFP+ Module	SFP-10G-SR
Power Adapter	PWR-IE65W-PC-AC=

Compare to Similar Items

Feature / Model	Cisco C1300-8FP-2G	Cisco C2960X-24PD-L	Cisco SG250-26HP-K9
PoE+ Ports	8x 10/100/1000 Mbps	24x 10/100/1000 Mbps	24x 10/100/1000 Mbps
Power Budget	120W	370W	192W
Uplink Ports	2x Gigabit combo ports	2x 10G SFP+	2x Gigabit combo ports
Form Factor	Desktop	Rack-mountable	Rack-mountable
Power Supply	External	Internal	Internal



Get More Information

Do you have any questions about the C1300-8FP-2G?

Contact us now via info@hi-network.com.

Specification

C1300-8FP-2G Datasheet	
Ports	8x 10/100/1000 PoE+ ports with 120W power budget
Combo Ports	2x Gigabit copper/SFP combo ports
Mounting	Rack-mountable
Forwarding Rate	14.88 Mpps
Switching Capacity	20.0 Gbps
Power	100-240V 50-60 Hz, internal, universal
PoE	Supported
Dimension	268 x 272 x 44 mm (10.56 x 10.71 x 1.73 in)
Weight	3.05 kg (6.72 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Console port	Cisco standard RJ-45 console port and USB Type C port
USB port	USB Type C port on the front panel of the switch for easy file and image management as well as console port
Buttons	Reset button
Cabling type	Unshielded Twisted Pair (UTP) Category 5e or better for 1000BASE-T
LEDs	System, Link/Act, PoE, Speed
Flash	512 MB
CPU	ARM dual-core at 1.4 GHz
DRAM	1 GB DDR4
Certifications	UL (UL 62368), CSA (CSA 22.2), CE mark, FCC Part 15 (CFR 47) Class A

Want to Buy





Get a Quote

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

