

Get a Quote

Overview


Cisco coded, 100BASE-BX-U SFP, 1310nm TX/1550nm RX, 20km, LC simplex connectors, DOM, Solid Optics.

Quick Specification

Product Name	GLC-FE-100BX-U
Form Type	SFP
Wavelength	1310nm-TX/1550nm-RX
Interface	LC simplex
TX Power	-14~-8dBm
Max Data Rate	100Mbps
Max Cable Distance	20km

Product Details:

The Front Panel:

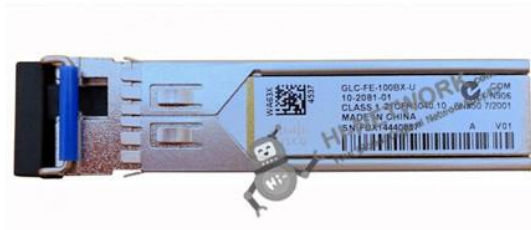

Get more information:

Do you have any question about the GLC-FE-100BX-U?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

General	
Device Type	SFP (mini-GBIC) transceiver module
Form Factor	Plug-in module
Networking	
Connectivity Technology	Wired
Cabling Type	100Base-BX
Data Link Protocol	100Mb LAN
Optical Wave Length	1310 nm
Max Transfer Distance	6.2 miles
Compliant Standards	IEEE 802.3, IEEE 802.3ah
Expansion / Connectivity	
Interfaces	1 x Ethernet 100Base-BX - LC single-mode
Compatible Slots	1 x SFP (mini-GBIC)
Dimensions & Weight	
Width	0.5 in
Depth	2.2 in
Height	0.3 in
Manufacturer Warranty	
Service & Support	Limited warranty - 90 days
Environmental Parameters	
Min Operating Temperature	32 °F
Max Operating Temperature	122 °F
Compatibility Information	
Designed For	Cisco Catalyst 2960-24LC-S, 2960-24PC-L, 2960-24PC-S, 2960-24TC, 2960-24TC-L, 2960-24TC-S, 2960-48PST-L, 2960-48PST-S, 2960-48T, 2960-48TC, 2960-48TC-L, 2960-48TC-S, 2960-8TC, 2960-8TC-S, 2960G-24TC, 2960G-48TC, 2960G-8TC, 2960S-24PD-L, 2960S-24PS-L, 2960S-24TD-L, 2960S-24TS-L, 2960S-24TS-S, 2960S-48FPD-L, 2960S-48FPS-L, 2960S-48LPD-L, 2960S-48LPS-L, 2960S-48TD-L, 2960S-48TS-L, 2960S-48TS-S, 3560-12PC, 3560-12PC-S, 3560-8PC

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223