Get a Quote

Overview

CISCO3925-SEC/K9 router is the CISCO3925/K9 router configured with a Security License.

Quick Specification

Table 1 shows the Quick Specification of the CISCO3925-SEC/K9.

Product Code	CISCO3925-SEC/K9
Bundle	Cisco 3925 Security Bundle w/SEC license PAK
Services Performance Engine module	w/SPE 100
Rack Units	3U
Interfaces	3 integrated 10/100/1000 Ethernet ports with 2 ports capable of RJ-45 or SFP connectivity
Expansion Slot(s)	2 service module slots 1 Internal Services Module slot 4 onboard digital signal processor (DSP) slots 4 Enhanced High-Speed WAN Interface Card (EHWIC) slots
RAM	1 GB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
Dimensions	47.6 cm x 43.8 cm x 13.3 cm
Package Weight	27.78 Kg

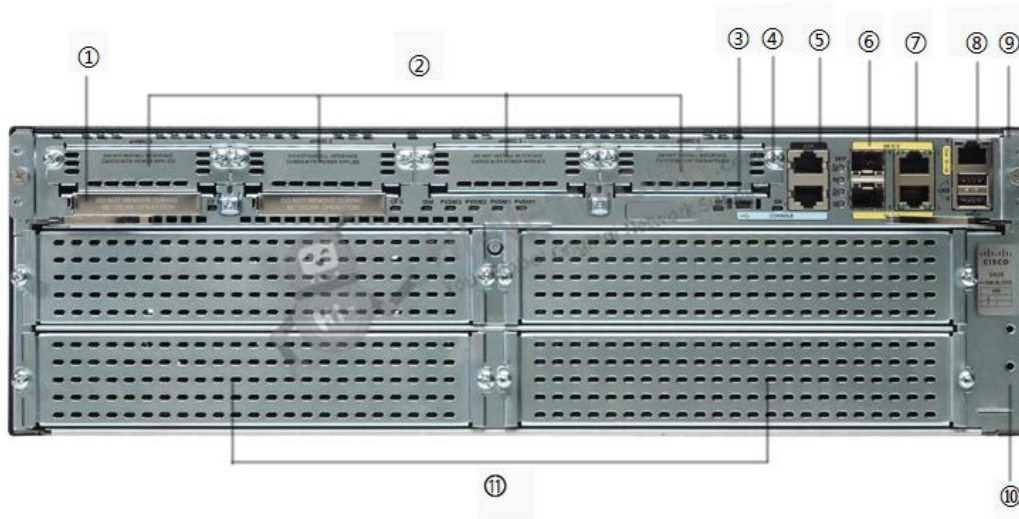**Figure 1 shows the appearance of the CISCO3925-SEC/K9.**

Product Details

Figure 2 shows the front panel of the Cisco 3925 router.

Note:

(1)	On/Off switch	(2)	Power connector	(3)	LEDs area

**Figure 3 shows the back panel of the Cisco 3925 router with slots and ports.**

Note:

(1)	Compact flash 0 and 1 (0, right)	(7)	10/100/1000 Ethernet port GE 0/1 and GE 0/2 (GE 0/1, down)
(2)	EHWIC 0,1,2 and 3 (0, far right)	(8)	10/100/1000 Ethernet port GE 0/0
(3)	USB serial port	(9)	USB 0 and USB 1 (1, top)
(4)	RJ-45 serial console port	(10)	Ground
(5)	AUX port	(11)	Service module slots
(6)	SFP 1 and SFP 2 (2, top)		

Security License

Figure 4 shows the Security License function.
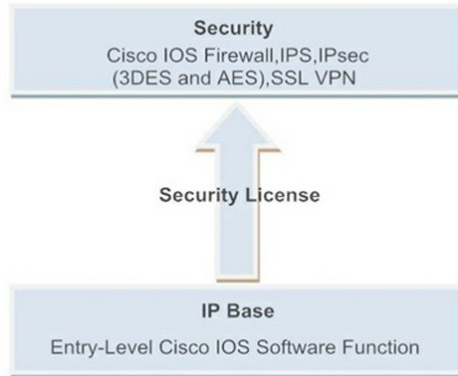
Get More Information

Do you have any question about the CISCO3925-SEC/K9?

Contact us now via info@hi-network.com.

Specification

CISCO3925-SEC/K9 Specification	
Device Type	Router
Form Factor	Desktop - modular - 3U
Connectivity Technology	Wired
Data Link Protocol	Ethernet, Fast Ethernet, Gigabit Ethernet
Capacity	Cisco Unified Communications Manager Express sessions: 250 Cisco Unified SRST sessions: 730
Network / Transport Protocol	IPSec, PPPoE, L2TPv3
Routing Protocol	OSPF, IS-IS, BGP, EIGRP, DVMRP, PIM-SM, IGMPv3, GRE, PIM-SSM, static IPv4 routing, static IPv6 routing, policy- basedrouting (PBR)
Remote Management Protocol	SNMP, RMON
Encryption Algorithm	SSL
Features	Firewall protection, VPN support, MPLS support, Syslog support, content filtering, IPv6 support, Class-Based Weighted Fair Queuing (CBWFQ), Weighted Random Early Detection (WRED), Access Control List (ACL) support, Quality of Service (QoS), Dynamic Multipoint VPN (DMVPN)
Compliant Standards	IEEE 802.3, IEEE 802.1Q, IEEE 802.1ah, IEEE 802.1ag

DRAM Memory	1 GB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
LED Status Lights Indicators	Link activity, power
Connectivity Slots	
Router Interfaces	WAN: 3 x 10Base-T/100Base-TX/1000Base-T - RJ-45 Management: 1 x console - RJ-45 Management: 1 x console - mini-USB Type B Serial: 1 x auxiliary - RJ-45 Hi-Speed USB: 2 x 4 PIN USB Type A 2 x SFP (mini-GBIC)
Expansion Slots Total (Free)	4 (4) x EHWIC 4 (4) x PVDM 2 (1) x CompactFlash Card 2 (2) x service module (SM) 1 (1) x Expansion Slot
Power Supply	
Power Device	Power supply - internal
Voltage Required	AC 120/230 V (50/60 Hz)
Dimensions / Weight / Miscellaneous	
Width	47.6 cm (18.74 in)
Depth	43.8 cm (17.24 in)
Height	13.3 cm (5.24 in)
Package Weight	27.78 kg (61.24 lbs)
Weight	17.7 kg (39.02 lbs)
Compliant Standards	CISPR 22 Class A, CISPR 24, EN55024, EN55022 Class A, EN50082-1, AS/NZS 60950-1, AS/NZ 3548 Class A, CAN/ CSA-E60065-00, ICES-003 Class A, FCC CFR47 Part 15, EN300-386, UL 60950-1, IEC 60950-1, EN 60950-1, CSA C22.2 No. 60065, BSMI CNS 13438, NEBS
System Software	
IOS Software Included	Cisco IOS Security

Want to Buy

Get a Quote

Learn More about Hi-Network

Search our Resource Library

Follow us on LinkedIn

Contact for Sales or Support

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

Contact HI-NETWORK.COM For Global Fast Shipping