

[Get a Quote](#)

Overview


Huawei AR G3 AR150 Series - AR157VW fixed interface access voice & wireless router AR0M1577BA00 provides routing, switching, voice and wireless functionality for small business or branch offices.

Quick Specification

Model	AR157VW
Part Number	02354416
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	WAN interfaces: 1 ADSL-A/M interface LAN interfaces: 4 10/100M auto-sensing Ethernet electrical interfaces Voice interface: 4 FXS interfaces and 1 FXO interface
Extended slots	Not supported
Interface number	LAN interfaces: FE0-FE3
Power module type	External power adapter
Weight	2.8 kg (6.17 lb)
Dimensions (W x D x H)	Without rack-mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With rack-mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)


Product Details:

The Front Panel:

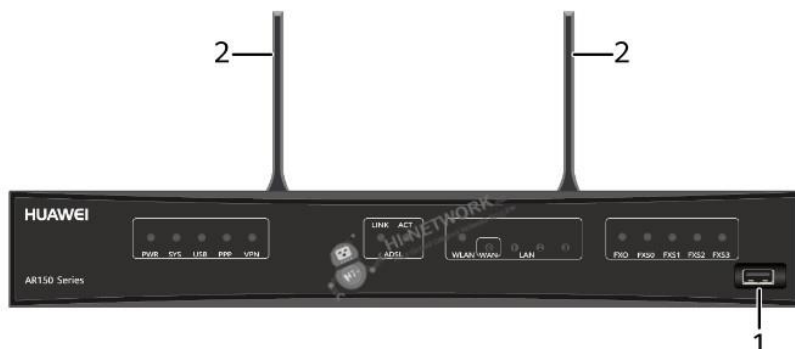

①	USB interface (host)
②	Two Wi-Fi antennas

The Back Panel:

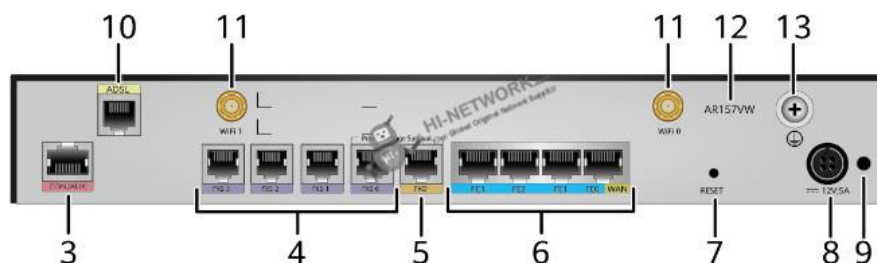

③	CON/AUX interface
④	Four FXS interfaces
⑤	One FXO interface
⑥	LAN interfaces: four FE electrical interfaces
⑦	RESET button
⑧	Power jack
⑨	Jack for power cable locking strap
⑩	WAN interface: ADSL-A/M interface
⑪	Two Wi-Fi antenna interfaces
⑫	Product model silkscreen
⑬	Ground point



The Accessories for AR157VW

Compare to Similar Items

Model	AR151VW	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)
Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm

Get more information:

Do you have any question about the AR157VW 02354416?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02354416
Model	AR157VW
First Supported Version	V200R003C00
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	WAN interfaces: 1 ADSL-A/M interface LAN interfaces: 4 10/100M auto-sensing Ethernet electrical interfaces Voice interface: 4 FXS interfaces and 1 FXO interface
Extended slots	Not supported
Weight	2.8 kg (6.17 lb)
Dimensions (W x D x H)	Without rack-mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With rack-mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Processor	Dual-core, 533 MHz
Micro SD card (sd1 by default)	None
Hard disk	Not supported
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz



Datasheet

Maximum input voltage range (AC)	90 V to 264 V, 47 Hz to 63 Hz
Maximum output current	5 A
Maximum output power	60 W
RPS	Not supported
PoE	Not supported
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption	20.8 W
Fan	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0	1
Service interfaces (standard configuration)	<p>WAN interface: one ADSL-A/M interface</p> <p>LAN interfaces: four FE electrical interfaces, in which FE0 LAN interface can be switched to a WAN interface, and two Wi-Fi antenna interfaces.</p>
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


AR157VW (02354416)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

