



## Overview

AR2000 Series Enterprise Routers, integrates routing, switching, voice, and security services and applies to medium-sized enterprise headquarters or large and medium-sized enterprise branches.

## Quick Specification

Table 1 shows the quick specification.

Model	AR2204E
Part Number	02350KGS
Description	AR2204E (3GE WAN (1GE Combo), 1 USB, 4 SIC, 60W AC Power (1+1))
Dimensions (H x W x D)	With no mounting bracket installed: 44.4 mm x 442.0 mm x 420.0 mm (1.75 in. x 17.40 in. x 16.54 in.) With mounting brackets installed: 44.4 mm x 482.6 mm x 420.0 mm (1.75 in. x 19.00 in. x 16.54 in.)
Weight	5 kg (11.02 lb)
Operating temperature	0°C to 45°C (32°F to 113°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)


Figure 1 shows the appearance of AR2204E.





## Product Details

Figure 2 shows the structure of AR2204E.

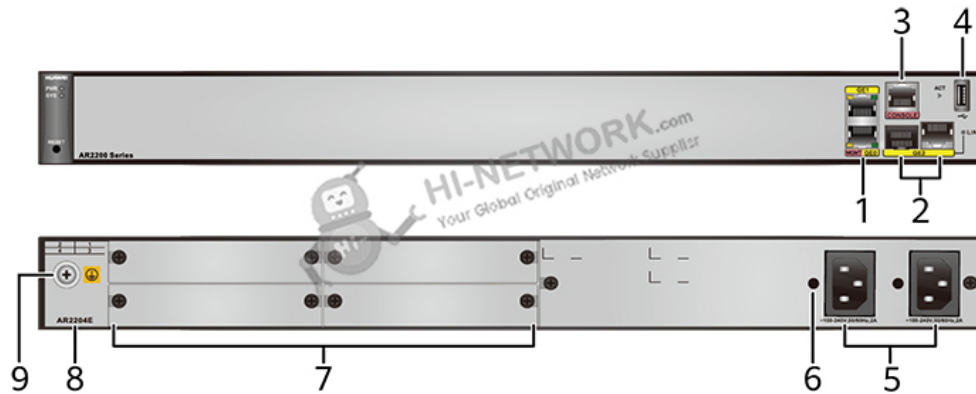

Note:

(1)	WAN interfaces: two GE electrical interfaces	(6)	Jack for power cable locking strap
(2)	WAN interface: GE combo interface	(7)	Four SIC slots
(3)	Console interface	(8)	Product model silkscreen
(4)	One USB interface (host)	(9)	Ground point
(5)	Two AC power jacks		

## Get More Information

Do you have any question about the AR2204E (02350KGS)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

AR2204E Datasheet	
Item	Specification
Model	AR2204E
Part Number	02350KGS
Description	AR2204E (3GE WAN (1GE Combo), 1 USB, 4 SIC, 60W AC Power (1+1))
System parameters	
Processor	Dual-core, 1 GHz
Memory	512 MB





Flash	512 MB
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions and weight	
Dimensions (H x W x D)	With no mounting bracket installed: 44.4 mm x 442.0 mm x 420.0 mm (1.75 in. x 17.40 in. x 16.54 in.) With mounting brackets installed: 44.4 mm x 482.6 mm x 420.0 mm (1.75 in. x 19.00 in. x 16.54 in.)
Weight	5 kg (11.02 lb)
Power specifications	
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum input current	2 A
Maximum output power	60 W
RPS power supply	Not supported
PoE power supply	Not supported
Power consumption	
Typical power consumption	25 W
Maximum power consumption	35 W
Heat dissipation	
Fan module	Built-in, unpluggable fans
Airflow (facing the front panel)	Left-to-right
Interface density	
Management interfaces	1 (RJ45)
Console interface	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces (standard configuration)	WAN interfaces: two GE electrical interfaces and one GE combo interface
Extended slots	4xSIC
Environment parameters	
Operating temperature	0°C to 45°C (32°F to 113°F) NOTE: When the altitude is between 1800 m and 5000 m, the highest operating temperature reduces by 1°C every time the altitude increases by 220 m.
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)





## Want to Buy

---

[Get a Quote](#)



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

