



## Overview

The NetEngine AR6000 series routers provide a broad range of options for customers of all sizes across industries to best suit their extensive application scenarios. The NetEngine AR6100 series is ideal for midsize branches.

## Quick Specification

Table 1 shows the quick specification.

Model	AR6140E-9G-2AC
Part Number	02353UYT, 02353UYT-002
Description	AR6140E-9G-2AC AC host, 5*GE RJ45, 4*GE SFP, 1*USB 3.0, 4*SIC
Dimensions with packaging (H x W x D)	175 mm x 550 mm x 710 mm (6.89 in. x 21.65 in. x 27.95 in.)
Weight with packaging	7.75 kg (17.09 lb)
Typical power consumption	22 W
Maximum power consumption	28 W


Figure 1 shows the appearance of AR6140E-9G-2AC.





## Product Details

Figure 2 shows the structure of AR6140E-9G-2AC.

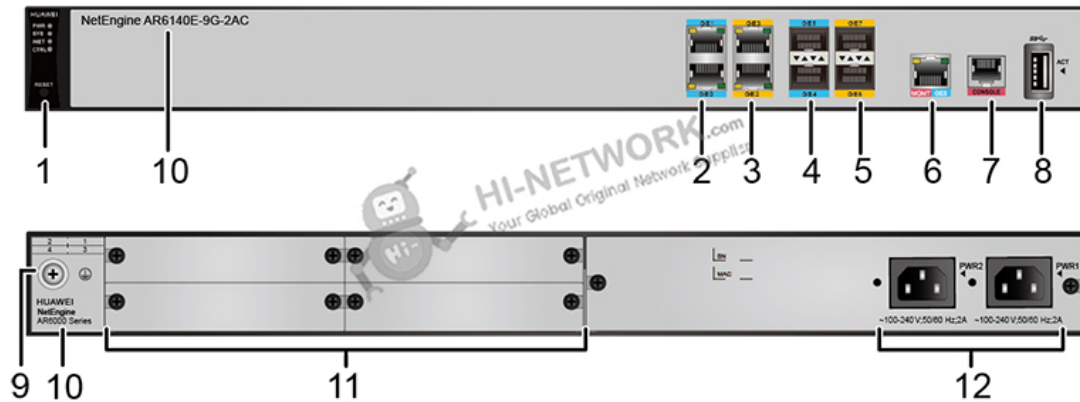

Note:

(1)	RESET button	(7)	Console interface
(2)	LAN interface: two GE electrical interfaces	(8)	USB interface 3.0 (host)
(3)	WAN interfaces: two GE electrical interfaces	(9)	Ground point
(4)	LAN interfaces: two GE optical interfaces	(10)	Product model silkscreen
(5)	WAN interfaces: two GE optical interfaces	(11)	Four SIC slots
(6)	LAN interface: one GE electrical interface	(12)	Two AC power jacks

## Get More Information

Do you have any question about the AR6140E-9G-2AC (02353UYT, 02353UYT-002)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

AR6140E-9G-2AC Datasheet	
Model	AR6140E-9G-2AC
Part Number	02353UYT, 02353UYT-002
Description	AR6140E-9G-2AC AC host, 5*GE RJ45, 4*GE SFP, 1*USB 3.0, 4*SIC
Installation type	Rack
Chassis height [U]	1
Dimensions without packaging (H x W x D) [mm(in.)]	- Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 428.2 mm (1.75 in. x 17.4 in. x 16.86 in.) - Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 431.2 mm (1.75 in. x 17.4 in. x 16.98 in.)





Dimensions with packaging (H x W x D) [mm(in.)]	175 mm x 550 mm x 710 mm (6.89 in. x 21.65 in. x 27.95 in.)
Weight with packaging [kg(lb)]	7.75 (17.09)
Weight without packaging [kg(lb)]	5.35 (11.79)
CPU	1.4 GHz, 4 Cores
Memory	4 GB
NAND Flash	1 GB
Console port	RJ45
RTC	Supported
LAN ports	2 x GE SFP, 3 x GE electrical
WAN ports	2 x GE SFP, 2 x GE electrical
Number of service board slots	4
MIC slots (default/maximum)	0/0
SIC slots (default/maximum)	4/4
WSIC slots (default/maximum)	0/2
XSIC slots (default/maximum)	0/0
Redundant MPUs	Not supported
RPS input	Not supported
PoE	Not supported
IP rating	IP20
MTBF [years]	64.50
MTTR [hours]	2
Availability	0.9999964601
Typical power consumption [W]	22
Maximum power consumption [W]	28
Power supply mode	AC built-in
Number of power modules	2
Rated input voltage [V]	100 V to 240 V, 50 Hz/60 Hz
Input voltage range [V]	90 V to 264 V, 47 Hz to 63 Hz
Maximum input current [A]	2
Maximum output power [W]	70 W
Redundant power supply	Dual power supplies in 1:1 backup mode
Types of fans	Built-in
Number of fan modules	2
Heat dissipation mode	Air cooling
Airflow	Left-to-right airflow
Noise at normal temperature (acoustic power) [dB(A)]	49.9
Long-term operating temperature [°C(°F)]	0°C to 45°C (32°F to 113°F) Note: When the altitude is 1800–5000 m (5906–16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Long-term operating altitude [m(ft.)]	< 5000 m (16404.2 ft.)





Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Overtemperature alarm	Supported

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

