

[Get a Quote](#)

## Overview

The LSS7M24BX6E0 provides twenty-four 100M/1000M/2.5GE/5GE/10GE BASE-T ports and twenty-four 100/1000BASE-T ports for data transmission and switching.

## Quick Specification

Table 1 shows the quick specification.


Description	LSS7M24BX6E0
Part Number	03034DGQ, 03034DGQ-001, 03034DGQ-003
Model	24-port 100M/1G/2.5G/5G/10G and 24-port 100M/1G interface card (X6E, RJ45)
Dimensions without packaging (H x W x D) [mm(in.)]	35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.)
Dimensions with packaging (H x W x D) [mm(in.)]	160 mm x 510 mm x 570 mm (6.3 in. x 20.1 in. x 22.44 in.)
Weight without packaging [kg(lb)]	3.70 kg (8.16 lb)
Weight with packaging [kg(lb)]	5.75 kg (12.68 lb)
Maximum power consumption [W]	192
Memory	1 GB
Basic function	The card provides twenty-four 100M/1000M/2.5GE/5GE/10GE BASE-T ports and twenty-four 100/1000BASE-T ports for data transmission and switching.
Distributed forwarding	Performs concurrent data forwarding using a distributed data plane.
Hot swapping	Supported

Figure 1 shows the appearance of LSS7M24BX6E0.



## Product Details


Figure 2 show the indicators on the LSS7M24BX6E0 panel.

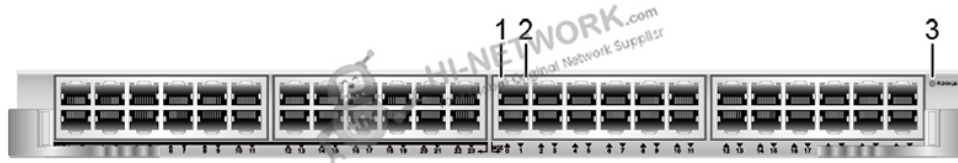

Note:

(1)	LINK/ACT indicator of an upper electrical port
(2)	LINK/ACT indicator of a lower electrical port
(3)	RUN/ALM: running status indicator

Figure 3 show the ports on the LSS7M24BX6E0 panel.

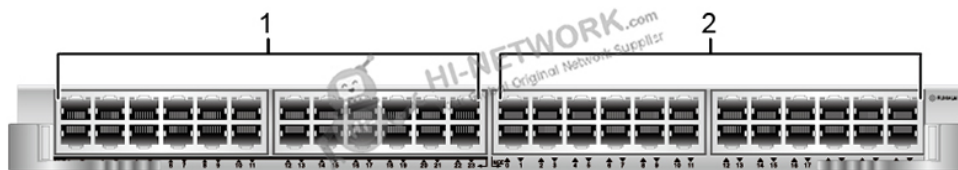

Note:

(1)	Twenty-four 100/1000BASE-T ports
(2)	Twenty-four 100M/1000M/2.5GE/5GE/10GE BASE-T ports (multi-GE ports)

## Get more information

Do you have any question about the LSS7M24BX6E0 (03034DGQ, 03034DGQ-001, 03034DGQ-003)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

LSS7M24BX6E0 Specification	
Basic Information	
Model	LSS7M24BX6E0
Part Number	03034DGQ, 03034DGQ-001, 03034DGQ-003

Description	24-port 100M/1G/2.5G/5G/10G and 24-port 100M/1G interface card (X6E, RJ45)
Level-1 category	Interface card
<b>Technical Specifications</b>	
Dimensions without packaging (H x W x D) [mm(in.)]	35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.)
Dimensions with packaging (H x W x D) [mm(in.)]	160 mm x 510 mm x 570 mm (6.3 in. x 20.1 in. x 22.44 in.)
Weight without packaging [kg(lb)]	3.70 kg (8.16 lb)
Weight with packaging [kg(lb)]	5.75 kg (12.68 lb)
Typical power consumption [W]	168
Typical heat dissipation [BTU/hour]	573.23
Maximum power consumption [W]	192
Maximum heat dissipation [BTU/hour]	655.12
Memory	1 GB

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223