

Datasheet

[Get a Quote](#)

Overview

Huawei S1730S-L16P-A is one of the Huawei S1730 unmanaged switches, with 16 10/100/1000BASE-T Ethernet ports, PoE+, and AC power supply. The S1700 unmanaged switch is deployed at the access layer of an enterprise network to deliver cost-effective packet switching capability. It provides high quality data transmission for enterprises. The S1700 unmanaged switch helps enterprises construct reliable networks that have high scalability.

Quick Specification

Model	S1730S-L16P-A
Part Number	98010879
PoE	Supported
Weight (including packaging)	3.79 kg (8.36 lb)
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.40 in. x 8.66 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 225.7 mm (1.72 in. x 17.40 in. x 8.89 in.)</p>

Product Details:


The Front Panel:



①	PD compatibility check button
②	Sixteen PoE+ 10/100/1000BASE-T ports

Datasheet

The Back Panel:

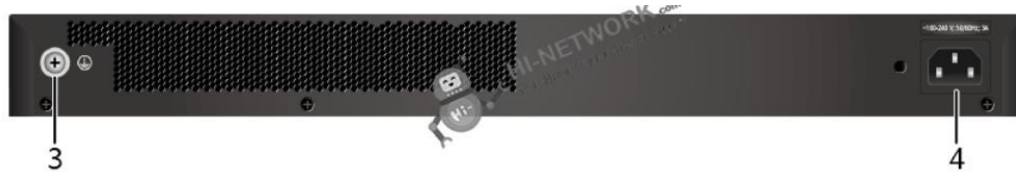

③	Ground screw
④	AC power socket

Compare to Similar Items

Model	S1730S-L16P-A	S1730S-L16T-A
Ports	16 10/100/1000BASE-T Ethernet ports	16 10/100/1000BASE-T Ethernet ports
PoE	Support PoE+	Not supported
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.40 in. x 8.66 in.)</p> <ul style="list-style-type: none"> Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 225.7 mm (1.72 in. x 17.40 in. x 8.89 in.) 	<ul style="list-style-type: none"> Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)

Get more information:

Do you have any question about the S1730S-L16P-A 98010879?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010879
Model	S1730S-L16P-A
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.40 in. x 8.66 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 225.7 mm (1.72 in. x 17.40 in. x 8.89 in.)</p>
Weight (including packaging)	3.79 kg (8.36 lb)
Service port surge protection	Common mode: ± 7 kV



Datasheet

Power supply surge protection	±6 kV in differential mode, ±6 kV in common mode
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	Without PoE: 15 W 100% PoE loads: 146 W (PoE: 124 W)
Typical power consumption (30% of traffic load)	14 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

