

# Datasheet

[Get a Quote](#)

## Overview

Huawei S1730S-L24T-A is one of the Huawei S1730 unmanaged switches, with 24 Ethernet 10/100/1000BASE-T ports, and AC power supply. The S1700 unmanaged switch is deployed at the access layer of an enterprise network to deliver cost-effective packet switching capability. It provides high quality data transmission for enterprises.


The S1700 unmanaged switch helps enterprises construct reliable networks that have high scalability.

## Quick Specification

Model	S1730S-L24T-A
Part Number	98010877
PoE	Not supported
Weight (including packaging)	2.24 kg (4.94 lb)
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</p>

## Product Details:

### The Front Panel:

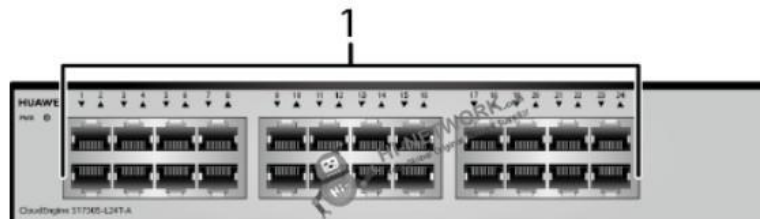

①	Twenty-four 10/100/1000BASE-T ports
---	-------------------------------------

## Datasheet

### The Back Panel:



②	Ground screw
③	AC power socket

### Compare to Similar Items

Model	<a href="#">S1730S-L16T-A</a>	<a href="#">S1730S-L24T-A</a>
Ports	16 10/100/1000BASE-T Ethernet ports	24 Ethernet 10/100/1000BASE-T ports
PoE	Not supported	Not supported
Dimensions (H x W x D)	<ul style="list-style-type: none"> <li>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</li> <li>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</li> </ul>	<ul style="list-style-type: none"> <li>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</li> <li>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</li> </ul>

Get more information:

Do you have any question about the S1730S-L24T-A 98010877?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010877
Model	S1730S-L24T-A
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</p>

## Datasheet

Weight (including packaging)	2.24 kg (4.94 lb)
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	16 W
Typical power consumption (30% of traffic load)	15 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223