



Datasheet

[Get a Quote](#)

Overview

Huawei S3700-28TP-EI-MC-AC is one of the Huawei S3700 Series switches. It integrates 4 Ethernet 10/100 ports, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP, and 2 MC ports.

Quick Specification


Model	S3700-28TP-EI-MC-AC
Part Number	02352374
Downlink Ports	24 Ethernet 10/100 ports
Uplink Ports	2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP
Forwarding Performance	9.6 Mpps
Switching Capacity	64 Gbit/s
Stacking	Supported
Dimensions (W x D x H)	44.2 cm x 22 cm x 4.36 cm



Datasheet

Product Details:

The Front Panel:

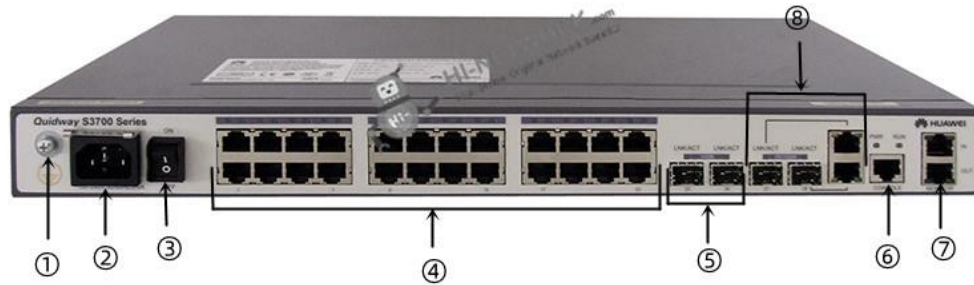

①	Ground Screw
②	AC jack
③	Switch
④	Twenty-four 10/100BASE-TX Ethernet electrical interfaces
⑤	Two 1000BASE-X Ethernet optical interfaces
⑥	One console interface
⑦	Two monitoring ports
⑧	Two 1000M combo interfaces (10/100/1000BASE-T+100/1000BASE-X)

The Back Panel:



Datasheet

The Accessories for S3700-28TP-EI-MC-AC

Recommended Optical Transceivers:

Models	Description
FE-SFP Optical Transceiver	
SFP-FE-SX-MM1310	Optical Transceiver,SFP,100M/155M,Multi-mode Module(1310nm,2km,LC)
eSFP-FE-LX-SM1310	Optical Transceiver,eSFP,100M/155M,Single-mode Module(1310nm,15km,LC)
S-SFP-FE-LH40-SM1310	Optical Transceiver, eSFP, FE, Single-mode Module(1310nm,40km,LC)
GE-SFP Optical Transceiver	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45)
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)

Compare to Similar Items

Models	S3700-28TP-EI-DC	S3700-28TP-EI-MC-AC	S3700-28TP-PWR-EI
Downlink Ports	24 x 10/100 Base-TX ports	24 x 10/100 Base-TX ports	24 x 10/100 Base-TX ports
Uplink Ports	2 x 1,000 Base-X SFP ports, and 2 gigabit combo ports	2 x 1,000 Base-X SFP ports, 2 monitor ports, and 2 gigabit combo ports	2 x 1,000 Base-X SFP ports, and 2 gigabit combo ports
Power Supply	DC power supply	AC power supply	AC power supply
PoE Support	N/A	N/A	PoE+

Get more information:

Do you have any question about the S3700-28TP-EI-MC-AC 02352374?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	S3700-28TP-EI-MC-AC
Model	02352374

Datasheet

Ports description	24*10/100Base-TX
	2*1000Base-X, 2*GE Combo
MAC address table	<p>IEEE 802.1d compliance</p> <p>16K MAC address entries</p> <p>MAC address learning and aging</p> <p>Static, dynamic, and blackhole MAC address entries</p> <p>Packet filtering based on source MAC addresses</p>
VLAN	<p>4K VLANs</p> <p>Guest VLANs, voice VLAN, and super VLAN</p> <p>MUX VLAN and GVRP</p> <p>VLAN assignment based on MAC addresses, protocols, and IP subnets</p> <p>QinQ</p> <p>Selective QinQ</p> <p>1:1 VLAN mapping</p> <p>N:1 VLAN mapping</p>
Reliability	<p>RRPP (ring topology, intersecting rings, and multi-instance), implementing protection switchover within 50 ms</p> <p>Smart Link tree topology and Smart Link multi-instance, providing the millisecond-level protection switchover</p> <p>STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s)</p> <p>BPDU protection, root protection, and loop protection</p> <p>Smart Ethernet Protection (SEP)</p>
	BFD for OSPF, BFD for IS-IS, BFD for VRRP, and BFD for PIM
IP routing	Static routing, RIPv1, RIPv2, and ECMP
	OSPF, IS-IS, and BGP
IPv6 features	<p>Neighbor Discovery (ND)</p> <p>Path MTU (PMTU)</p> <p>IPv6 ping, IPv6 tracert, and IPv6 Telnet</p> <p>Manually configured tunnel</p> <p>6to4 tunnel</p> <p>ISATAP tunnel</p> <p>ACLs based on the source IPv6 address, destination IPv6 address, Layer 4 ports, or protocol type</p> <p>MLD v1/v2 snooping</p>
Multicast	<p>1 K multicast groups</p> <p>IGMP v1/v2/v3 snooping and IGMP fast leave</p> <p>Multicast VLAN and multicast replication between VLANs</p> <p>Multicast load balancing among member ports of a trunk</p> <p>Controllable multicast</p> <p>Port-based multicast traffic statistics</p>
	IGMP v1/v2/v3, PIM-SM, PIM-DM and PIM-SSM
QoS/ACL	<p>Rate limiting on packets sent and received by an interface</p> <p>Packet redirection</p> <p>Port-based traffic policing and two-rate three-color CAR</p> <p>Eight queues on each port</p> <p>WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms</p>

Datasheet

	<p>Re-marking of the 802.1p priority and DSCP priority</p> <p>Packet filtering on Layers 2 through 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, port number, protocol type, and VLAN ID</p> <p>Rate limiting in each queue and traffic shaping on ports</p>
Security	<p>User privilege management and password protection</p> <p>DoS attack defense, ARP attack defense, and ICMP attack defense</p> <p>Binding of the IP address, MAC address, interface, and VLAN</p> <p>Port isolation, port security, and sticky MAC</p> <p>Blackhole MAC address entries</p> <p>Limit on the number of learned MAC addresses</p> <p>802.1x authentication and limit on the number of users on an interface</p> <p>AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC</p> <p>SSH v2.0</p> <p>CPU defense</p> <p>Blacklist and whitelist</p>
Surge protection	6KV surge protection capability on service ports (1KV on service ports on PoE devices)
Management and maintenance	<p>iStack</p> <p>MAC Forced Forwarding (MFF)</p> <p>Remote configuration and maintenance using Telnet</p> <p>Auto-Config</p> <p>Virtual cable test</p> <p>Ethernet OAM (IEEE 802.3ah and 802.1ag)</p> <p>Dying gasp power-off alarm (S3700-28TP-EI-MC-AC)</p> <p>SNMP v1/v2c/v3 and RMON</p> <p>Web NMS</p>
Operating environment	<p>Operating temperature: 0°C–50°C(long term);</p> <p>Relative humidity: 10%–90% (non-condensing)</p>
Power supply	<p>AC:</p> <p>Rated voltage range: 100V to 240V AC; 50/60 Hz</p> <p>Maximum voltage range: 90V to 264V AC; 50/60 Hz</p>
Dimensions (W x D x H)	442 mm x 220 mm x 43.6 mm
Weight	S3700-28TP-EI-MC<2.5Kg
Power consumption	S3700-28TP-EI-MC<20W

Want to Buy

[Get a Quote](#)

Datasheet



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223