

[Get a Quote](#)

## Overview

S5710-28C-PWR-LI Bundle (24 Ethernet 10/100/1000 POE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP, with 1 interface slot, with 500W AC power)

## Quick Specification

Table 1 shows the Quick Specification.


Model	S5710-28C-PWR-LI
Part Number	02354136
Description	S5710-28C-PWR-LI Bundle (24 Ethernet 10/100/1000 POE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP, with 1 interface slot, with 500W AC power)
Memory (RAM)	256 MB
Flash	32 MB
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)
Weight	Empty: ≤ 5 kg (11.02 lb) Fully configured: ≤ 8.5 kg (18.74 lb)
Stack ports	Two stack ports available on each stack card
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, 100% PoE loads, full speed of fans)	836 W (system power consumption: 96 W, PoE: 740 W)

Figure 1 shows the appearance of S5710-28C-PWR-LI.



## Product Details

Figure 2 shows the structure of S5710-28C-PWR-LI.

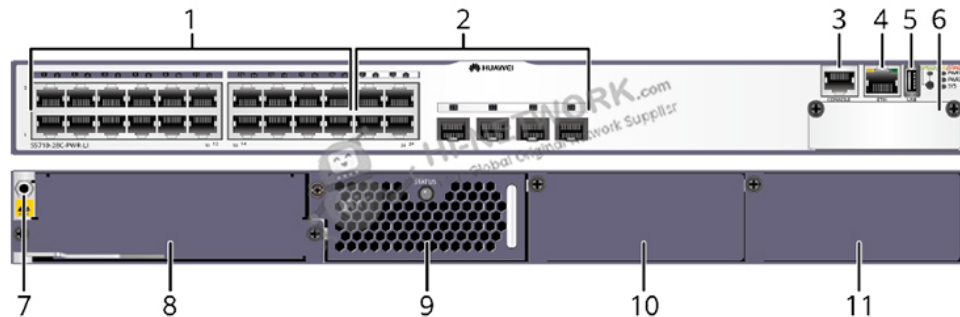

Note:

(1)	Twenty PoE+ 10/100/1000BASE-T ports	(7)	ESD jack
(2)	Four combo ports (10/100/1000BASE-T (PoE+) + 100/1000BASE-X)	(8)	Rear card slot
(3)	One console port	(9)	Fan slot
(4)	One ETH management port	(10)	Power module slot 2
(5)	One USB port	(11)	Power module slot 1
(6)	Front card slot		

## Get more information

Do you have any question about the S5710-28C-PWR-LI (02354136)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

S5710-28C-PWR-LI Specification	
Model	S5710-28C-PWR-LI
Part Number	02354136
Description	S5710-28C-PWR-LI Bundle (24 Ethernet 10/100/1000 POE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP, with 1 interface slot, with 500W AC power)
Memory (RAM)	256 MB
Flash	32 MB
Mean time between failures (MTBF)	53.6 years when a 2-port 10GE interface card is configured, 74.6 years when a 4-port GE front card is configured, 25.68 years when a 4-port 10GE front card is configured

Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: $\pm 1$ kV
Power supply surge protection	$\pm 2$ kV in differential mode, $\pm 4$ kV in common mode
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)
Weight	Empty: $\leq 5$ kg (11.02 lb) Fully configured: $\leq 8.5$ kg (18.74 lb)
Stack ports	Two stack ports available on each stack card
RPS	Not supported
PoE	Supported
cc	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, 100% PoE loads, full speed of fans)	836 W (system power consumption: 96 W, PoE: 740 W)
Operating temperature	0°C to 50°C (32°F to 122°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 45 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


S5710-28C-PWR-LI (02354136)

Datasheet



**Contact HI-NETWORK.COM For Global Fast Shipping**

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223