

## Datasheet

[Get a Quote](#)

### Overview

Huawei S5720-56C-PWR-EI-DC Gigabit Switch provides resilient, energy-efficient GE ports for access switching in data centers, and aggregation switching in enterprise campus networks. With 48 x 10/100/1,000 Base-T Ethernet ports and 4 x 10G SFP+ ports, its performance enhancements include advanced processing hardware, 10 Gbit/s uplink ports, and large MAC address and routing tables; Super Virtual Fabric (SVF) support enables intelligent virtualization, iStack clustering, and operation in N + 1 backup mode for simplified O&M and high availability. The ports have PoE function, and it also has multiple kinds of card modules to be equipped with. Huawei S5720-56C-PWR-EI-DC Gigabit Switch is dedicated to helping customers build a reliable, secure and high performance next-generation IT network.


### Quick Specification

Model	S5720-56C-PWR-EI-DC
Part Number	02350NHM
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	10.3 kg (22.71 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)</p>

## Datasheet

### Product Details:

#### Appearance:

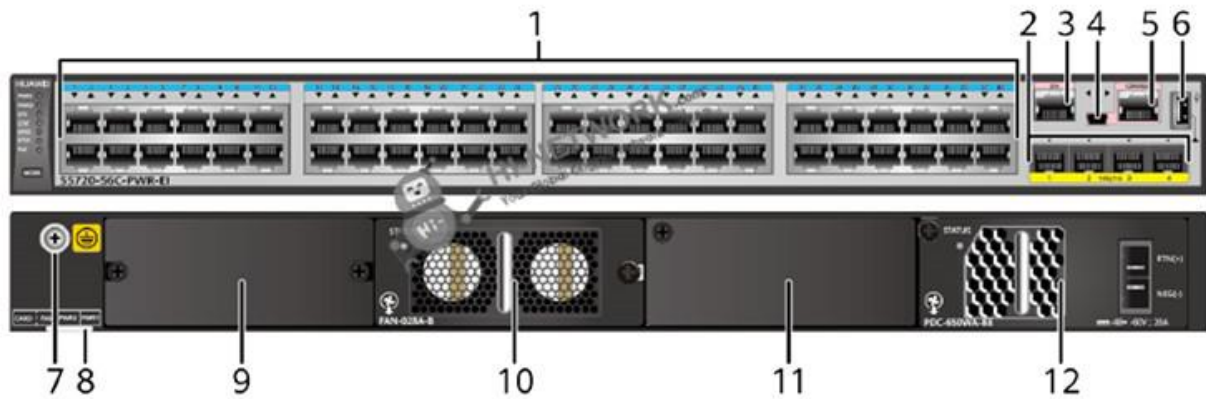

①	Forty-eight PoE+ 10/100/1000BASE-T ports
②	Four 10GE SFP+ ports
③	One ETH management port
④	One mini USB port
⑤	One console port
⑥	One USB port
⑦	Ground screw
⑧	ESN label
⑨	Rear card slot
⑩	Fan slot
⑪	Power module slot 2
⑫	Power module slot 1

### The Accessories for S5720-56C-PWR-EI-DC:

#### Recommended Modules:

Category	Model	Description
Power Module	PDC-650WA-BE	650W DC PoE Power Module(Black, Power panel side exhaust)
	PAC-500WA-BE	500W AC PoE Power Module(Black, Power panel side exhaust)



## Datasheet

Optical Transceiver	<a href="#">eSFP-GE-SX-MM850</a>	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
	<a href="#">SFP-GE-LX-SM1310</a>	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
	S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
	<a href="#">S-SFP-GE-LH40-SM1550</a>	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)
	<a href="#">SFP-1000BaseT</a>	Electrical Transceiver, SFP , GE ,Electrical Interface Module(100m,RJ45)
	<a href="#">SFP-10G-USR</a>	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module(850nm,0.1km,LC)
	<a href="#">OMXD30000</a>	Optical Transceiver, SFP+, 10G, Multi-mode Module(850nm,0.3km,LC)
	<a href="#">OSX010000</a>	Optical Transceiver, SFP+, 10G, Single-mode Module(1310nm,10km,LC)
Fan Module	FAN-028A-B	S5700 Fan box(F,FAN panel side intake)
Card	ES5D21X02S01	2 10 Gig SFP+ Interface Card(used in S5720EI series)
	ES5D21X02T01	2 10 Gig RJ45 Interface Card(used in S5720EI series)
	ES5D21VST000	Dedicated stack card with 2*QSFP+ interface(Including one PCS of 1M QSFP+ cable ,Used in S5720EI series)

### Compare To Similar Items:

Models	<a href="#">S5720-56C-EI-DC</a>	<a href="#">S5720-56C-PWR-EI-DC</a>	<a href="#">S5720-56C-EI-48S-DC</a>
Fixed Ports	48 x 10/100/1,000 Base-T, 4 x 10 Gig SFP+	48 x 10/100/1,000 Base-T, 4 x 10 Gig SFP+	48 x 100/1,000 Base-X SFP, 4 x 10 Gig SFP+
Extended Slots	One extended	One extended	One extended
PoE	Not supported	Supported	Not supported
Forwarding Performance	162 Mpps	162 Mpps	162 Mpps
Switching Capacity	598 Gbit/s	598 Gbit/s	598 Gbit/s
Front Power Input	No	No	No
Power Consumption	40.5W	without PD: 53.5W, with PD: < 1,564.8W (PoE: 1,440W)	68.8W

Get more information:

Do you have any question about the S5720-56C-PWR-EI-DC 02350NHM?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	02350NHM
Model	S5720-56C-PWR-EI-DC



# Datasheet

Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	51.34 years when no card is configured; 48.63 years when a 2-port 10GE SFP+ interface card is configured; 47.71 years when a 2-port 10GE RJ45 interface card is configured; 47.79 years when a stack card is configured
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Service ports on front panel: $\pm 6$ kV in common mode Ports on the 2-port 10GE RJ45 rear interface card: $\pm 2$ kV in common mode
Power supply surge protection	Using 500 W AC power modules: $\pm 6$ kV in differential mode, $\pm 6$ kV in common mode Using 650 W DC power modules: $\pm 2$ kV in differential mode, $\pm 4$ kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)
Weight (with packaging)	10.3 kg (22.71 lb)
Stack ports	Ports on the 2-port 10GE SFP+ rear interface card Ports on the 2-port 10GE RJ45 rear interface card Ports on the 2-port QSFP+ rear stack card
RTC	Supported
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -38.4 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	Not providing the PoE function: 98 W 100% PoE loads: 913 W (system power consumption: 173 W, PoE: 740 W)
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>Tested according to ATIS standard</li> <li>EEE enabled</li> <li>No PoE power consumption</li> </ul>	56.68 W (without card) 63.63 W (with 2*10GE optical card) 68.56 W (with 2*QSFP+ stack card) 72.61 W (with 2*10GE electrical card)
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 53.7 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification



## Datasheet

Manufacturing certification

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

