

Datasheet

[Get a Quote](#)

Overview

Huawei S6720S-26Q-EI-24S-AC switch is a retail version. The Huawei S6720 series offers high-availability, scalable 10 Gbit/s server access for Internet Data Centers (IDCs) and large traditional data centers. It also provides optional configuration of 4 x 40 GE QSFP+ interface card gives the S6720-EI Series Switches unusual flexibility: use to provide access to high-bandwidth server-based applications, or as a core or aggregation switch in enterprise campus networks.


Quick Specification

Model	S6720S-26Q-EI-24S-AC
Part Number	02350MTR
Memory	2 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	5.4 kg (11.91 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 222.3 mm (1.75 in. x 17.4 in. x 8.75 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 44.4 mm x 442.0 mm x 250.0 mm (1.75 in. x 17.4 in. x 9.84 in.)

Datasheet

Product Details:

Appearance:

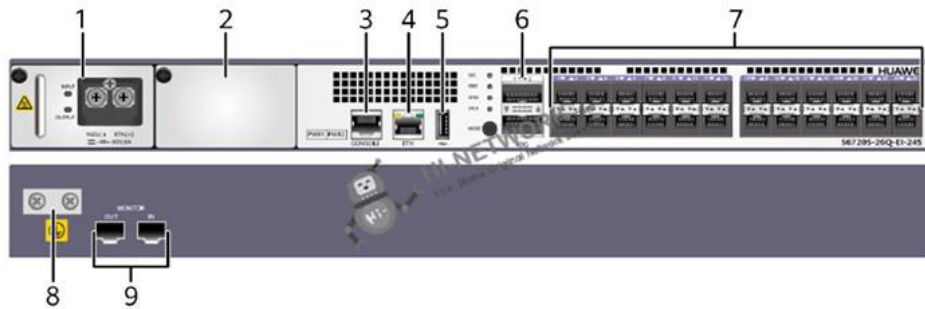

①	Power module slot 1
②	Power module slot 2
③	One console port
④	One ETH management port
⑤	One USB port
⑥	Two 40GE QSFP+ ports
⑦	Twenty-four 10GE SFP+ ports
⑧	Ground screw
⑨	Monitoring port

Get more information:

Do you have any question about the S6720S-26Q-EI-24S-AC 02350MTR?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02350MTR
Model	S6720S-26Q-EI-24S-AC
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	69.53 years

Datasheet

Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	NA
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 1 kV in differential mode, ± 2 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 222.3 mm (1.75 in. x 17.4 in. x 8.75 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 44.4 mm x 442.0 mm x 250.0 mm (1.75 in. x 17.4 in. x 9.84 in.)
Weight (with packaging)	5.4 kg (11.91 lb)
Stack ports	Any 10GE SFP+ ports (a maximum of 16 physical ports) Any 40GE QSFP+ ports (a maximum of 2 physical ports)
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	143.4 W
Typical power consumption (30% of traffic load, tested according to ATIS standard)	108.59 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 67.1 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	AC power modules configured: 0-5000 m (0-16404 ft.) DC power modules configured: 0-2000 m (0-6562 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223