



[Get a Quote](#)

## Overview

CISCO WS-C2960+48TC-L Catalyst 2960 Plus 48 10/100 + 2 T/SFP LAN Base.

## Quick Specification

Product Code	WS-C2960+48TC-L
Enclosure Type	Rack-mountable 1U
Feature Set	LAN Base
Uplink Interfaces	2 (SFP or 1000BASE-T)
Ports	48 x 10/100 Ethernet Ports
Forwarding Bandwidth	16 Gbps
Forwarding Performance	6.5 Mpps
RAM	128MB
Flash Memory	64MB
Dimensions	4.4cm x 45.0cm x 24.2cm
Weight	7.73 Kg




**Product Details:**

**The Front Panel:**



①	Switch LEDs
②	Mode Button
③	48*10/100 ports

**The Back Panel:**

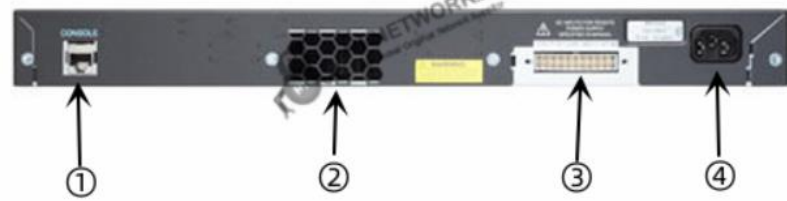

Note:

- ① RJ-45 console port
- ② Fan exhaust
- ③ RPS connector
- ④ AC power connector

## The Accessories for C2960+

### Modules and Cables:

Models	Description
<a href="#">WS-C2960+48TC-L</a>	Catalyst 2960 Plus 48 10/100 + 2 T/SFP LAN Base
CON-SMBS-WSC2968C	CSCO SUP ESS 8X5XNBD Cat 2960 Plus 48 10/100 + 2 T/SFP L
CAB-ACE	AC Power Cord (Europe), C13, CEE 7, 1.5M

Get more information:

Do you have any question about the Cisco Catalyst C2960+48TC-L switch?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

## Specific Data Sheet:

10/100 Ethernet Interfaces	48
Uplink Interfaces	2 (SFP or 1000BASE-T)
Cisco IOS Software Feature Set	LAN Base
Available PoE Power	N
Flash memory	64 MB
DRAM	128 MB
Forwarding bandwidth	16 Gbps
Jumbo frame - Ethernet frame	9018 bytes
Dimensions (H x W x D)	1.73 x 17.70 x 9.52 in (4.4 x 45.0 x 24.2 cm)
Weight	17.04 lb (7.73 Kg)
Operating temperature up to 5000 ft (1500 m)	23° to 113°F(-5° to 45°C)
Operating temperature up to 10,000 ft (3000 m)	23° to 104°F(-5° to 40°C)
Short-term exception at sea level*	23° to 131°F(-5° to 55°C)
Short-term exception up to 5000 feet (1500 m)*	23° to 122°F(-5° to 50°C)
Short-term exception up to 10,000 feet (3000 m)*	23° to 113°F(-5° to 45°C)
Short-term exception up to 13,000 feet (4000 m)*	23° to 104°F(-5° to 40°C)
Storage temperature up to 15,000 feet (4573 m)	23° to 158°F(-25° to 70°C)
Operating altitude	Up to 10,000 Feet(Up to 3,000 Meters)
Storage altitude	Up to 13,000 Feet(Up to 4,000 Meters)
Operating relative humidity	10% to 95% noncondensing

Storage relative humidity	10% to 95% noncondensing
---------------------------	--------------------------

## Want to Buy?

---

Order Now

Get a Quote



Learn More about Hi-Network



Search our Resource Library



Follow us on LinkedIn



Contact for Sales or Support

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

