

Datasheet

[Get a Quote](#)

Overview

Huawei S5720-28X-PWR-SI-AC is a Layer 3 Ethernet switch. It supports twenty-four Ethernet 10/100/1,000 PoE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP, and 4 x 10G SFP+. It offers double hot-swappable AC/DC power supplies, one AC power module is configured by default.


Quick Specification

Model	S5720-28X-PWR-SI-AC
Part Number	02350DLW
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	9.3 kg (20.51 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)

Datasheet

Product Details:

Appearance:

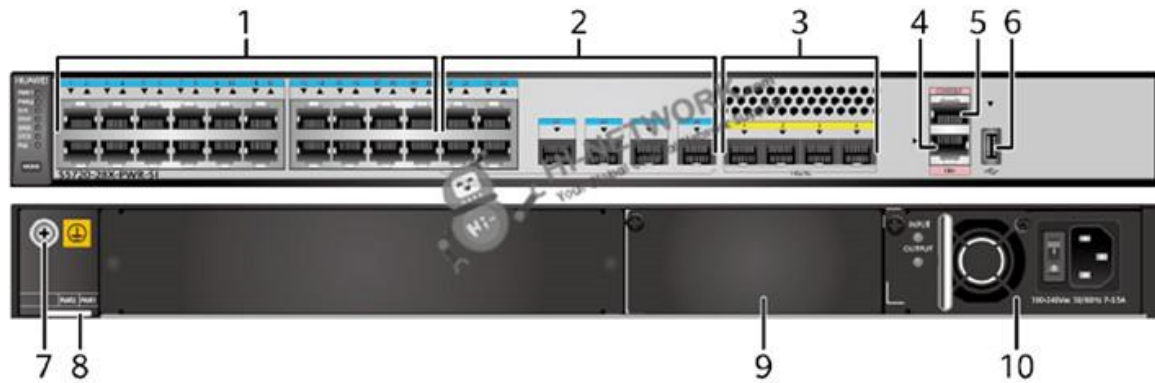

①	Twenty PoE+ 10/100/1000BASE-T ports
②	Four combo ports (10/100/1000BASE-T (PoE+) + 100/1000BASE-X)
③	Four 10GE SFP+ ports
④	One ETH management port
⑤	One console port
⑥	One USB port
⑦	Ground screw
⑧	ESN label
⑨	Power module slot 2
⑩	Power module slot 1

The Accessories for S5720-28X-PWR-SI-AC:

Recommended models:

Model	Description
GE-SFP Optical Transceiver	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45)
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)

Datasheet

SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)
10GE SFP+ optical transceiver	
SFP-10G-USR	10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.1km,LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)
OSX010000	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC)

Compare to Similar Items:

Models	S5720-52X-PWR-SI-AC	S5720-28X-PWR-SI-AC
Downlink Ports	48 x Ethernet 10/100/1,000 PoE+ ports	24 Ethernet 10/100/1000 PoE+ ports,4 of which are dual-purpose 10/100/1000 or SFP
Uplink Ports	4 x 10 Gig SFP+	4 x 10 Gig SFP+
Power Supply	AC Power Supply	AC Power Supply
PoE	Supported	Supported

Get more information:

Do you have any question about the S5720-28X-PWR-SI-AC 02350DLW?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02350DLW
Model	S5720-28X-PWR-SI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	66.78 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	Using 500 W AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using 650 W DC power modules: ± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel):

Datasheet

	44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)
Weight (with packaging)	9.3 kg (20.51 lb)
Stack ports	GE electrical ports and 10GE SFP+ optical ports except combo ports on the front panel
RTC	Supported
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -38.4 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	Not providing the PoE function: 56.1 W 100% PoE loads: 913 W (system power consumption: 173 W, PoE: 740 W)
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	31.8 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 56.5 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223