

Datasheet

[Get a Quote](#)

Overview

Huawei S5720-36C-EI-28S-DC is one of the S5720-EI switches. Huawei's S5720-EI Series Gigabit Switches provide resilient, energy-efficient GE ports for access switching in data centers, and aggregation switching in enterprise campus networks. Performance enhancements include advanced processing hardware, 10 Gbit/s uplink ports, and large MAC address and routing tables; Super Virtual Fabric (SVF) support enables intelligent virtualization, iStack clustering, and operation in N + 1 backup mode for simplified O&M and high availability. Mature IPv6 features ensure smooth migration to next-generation IP networking.


Quick Specification

Model	S5720-36C-EI-28S-DC
Part Number	02350NHN
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	9.7 kg (21.39 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)</p>

Datasheet

Product Details:

Appearance:

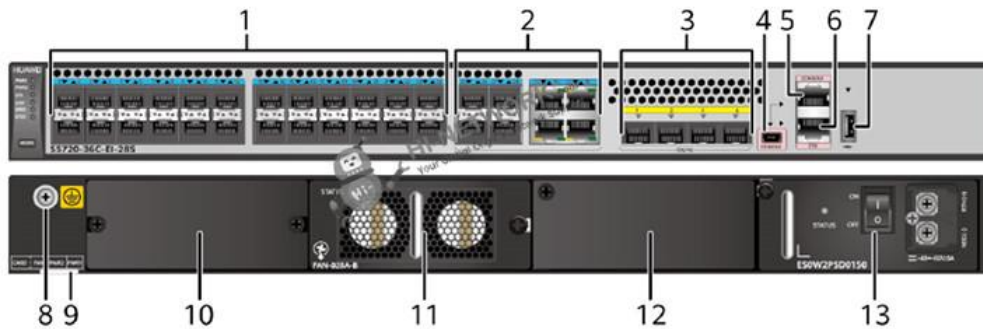

①	Twenty-four 100/1000BASE-X ports
②	Four combo ports (10/100/1000BASE-T + 100/1000BASE-X)
③	Four 10GE SFP+ ports
④	One mini USB port
⑤	One console port
⑥	One ETH management port
⑦	One USB port
⑧	Ground screw
⑨	ESN label
⑩	Rear card slot
⑪	Fan slot
⑫	Power module slot 2
⑬	Power module slot 1

The Accessories for S5720-36C-EI-28S-DC:

Recommended elements:

Model	Description
FE-SFP Optical Transceiver	

Datasheet

SFP-FE-SX-MM1310	Optical Transceiver, SFP, 100M/155M, Multi-mode Module(1310nm, 2km, LC)
eSFP-FE-LX-SM1310	Optical Transceiver, eSFP, 100M/155M, Single-mode Module(1310nm, 15km, LC)
S-SFP-FE-LH40-SM1310	Optical Transceiver, eSFP, FE, Single-mode Module(1310nm, 40km, LC)
GE-SFP Optical Transceiver	
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)
10G-SFP+ Optical Transceiver	
SFP-10G-USR	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module(850nm,0.1km,LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)
OSX010000	Optical Transceiver, SFP+, 10G, Single-mode Module(1310nm,10km,LC)
GE Copper Transceiver	
SFP-1000BaseT	Electrical Transceiver,SFP,GE,Electrical Interface Module(100m,RJ45)
10GE Interface Card	
ES5D21X02T01	2 10 Gig RJ45 Interface Card(used in S5720EI series)
ES5D21X02S01	2 10 Gig SFP+ Interface Card(used in S5720EI series)
Stack Card	
ES5D21VST000	Dedicated stack card with 2*QSFP+ interface(Including one PCS of 1M QSFP+ cable ,Used in S5720EI series)

Compare to Similar Items:

Product Code	S5720-36C-EI-28S-DC	S5720-32P-EI-AC	S5720-32X-EI-24S-DC
Switching Capacity	598 Gbit/s	598 Gbit/s	598 Gbit/s
Forwarding Performance	132 Mpps	48 Mpps	102 Mpps
Fixed Interfaces	28 x 100/1,000 Base-X SFP ports, 4 x combo 10/100/1,000 Base-T Ethernet ports, and 4 x 10G SFP+ ports	24 x 10/100/1,000 Base-T, 4 x 100/1,000 Base-X SFP, 4 Gig SFP	24 x 100/1,000 Base-X SFP ports, 4 x 10/100/1,000 Base-T Ethernet ports, and 4 x 10G SFP+ ports
Extended Slot	One extended slot supporting a service subcard or stack card	No	No
Dimensions (W x D x H)	442 mm x 420 mm x 44.4 mm	442 mm x 220 mm x 43.6 mm	442.0 mm x 220.0 mm x 43.6 mm
Front Power Input	Yes	Yes	No

Get more information:

Datasheet

Do you have any question about the S5720-36C-EI-28S-DC 02350NHN?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02350NHN
Model	S5720-36C-EI-28S-DC
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	85.45 years when no card is configured; 78.2 years when a 2-port 10GE SFP+ interface card is configured; 75.87 years when a 2-port 10GE RJ45 interface card is configured; 76.05 years when a stack card is configured
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Service ports on front panel: ± 6 kV in common mode Ports on the 2-port 10GE RJ45 rear interface card: ± 2 kV in common mode
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 1 kV in differential mode, ± 2 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)
Weight (with packaging)	9.7 kg (21.39 lb)
Stack ports	Ports on the 2-port 10GE SFP+ rear interface card Ports on the 2-port 10GE RJ45 rear interface card Ports on the 2-port QSFP+ rear stack card
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	83.9 W
Typical power consumption (30% of traffic load)	47.86 W (without card) 55.35 W (with 2*10GE optical card) 60.25 W (with 2*QSFP+ stack card) 63.5 W (with 2*10GE electrical card)
<ul style="list-style-type: none"> Tested according to ATIS standard EEE enabled No PoE power consumption	
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)

Datasheet

Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 51.2 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	AC power modules configured: 0-5000 m (0-16404 ft.) DC power modules configured: 0-2000 m (0-6562 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

