

Datasheet

[Get a Quote](#)

Overview

The CloudEngine S5731-H series switches are the next-generation intelligent gigabit fixed switches developed by Huawei. The CloudEngine S5731-H builds on Huawei's unified Versatile Routing Platform (VRP) and boasts various IDN features.


Quick Specification

Model	S5731S-H24T4XC-A
Part Number	02352YRG/02352YRG -001/02352YRG -003
Memory (RAM)	4 GB
Flash memory	1 GB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 448.0 mm (1.72 in. x 17.4 in. x 17.7 in.)
Weight (with packaging)	9.35 kg (20.61 lb)

Datasheet

Product Details:

Appearance:

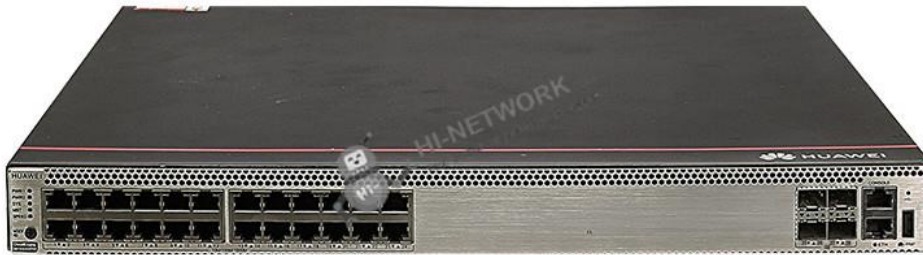

The Accessories for S5731S-H24T4XC-A

Recommended elements for the S5731S-H24T4XC-A

Models	Descriptions
PAC600S12-CB	600W AC Power Module(Back to Front, Power panel side exhaust)
ES5D21Q02Q00	2-port 40GE QSFP+ interface card
ES5D21X08T00	8-port 10GE Base-T interface card
eSFP-GE-SX-MM850	Optical Transceiver,eSFP,GE,Multi-mode Module(850nm,0.55km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,40km,LC)
SFP-GE-ZBXU1	Optical Transceiver,eSFP,GE,BiDi Single-mode Module(1490nm(Tx)/1570nm(Rx),80km,LC)



Datasheet

SFP-GE-LX-SM1490-BIDI	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,10km,LC)
eSFP-GE-ZX100-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,100km,LC)
SFP-GE-ZBXD1	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(1570nm(Tx)/1490nm(Rx),80km,LC)
LE2MGSC40DE0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/RX1490,40km,LC)
LE2MGSC40ED0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,40km,LC)
SFP-GE-BXU1-SC	1000Base,BIDI Optical Transceiver,SFP,GE,Single-mode Module(TX1490nm/RX1310nm,10km,SC)
SFP-10G-iLR	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,1.4km,LC)
CWDM-SFPGE-1611	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1611nm,80km,LC)
SFP-10G-USR	10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.1km,LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)
SFP-1000BaseT	Electrical Transceiver,SFP,GE,Electrical Interface Module(100m,RJ45)
OSX010000	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC)

Compare to Similar Items

Product Code	S5731S-H24T4XC-A	S5731S-H48T4XC-A
Memory (RAM)	4 GB	4 GB
Flash	1 GB in total. To view the available flash memory size, run the display version command.	1 GB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	57.73 years	55.31 years
Mean time to repair (MTTR)	2 hours	2 hours
Availability	> 0.99999	> 0.99999
Service port surge protection	Common mode: ± 6 kV	Common mode: ± 6 kV
Stack ports	10GE SFP+ ports on the front panel, or ports on the rear card	10GE SFP+ ports on the front panel, or ports on the rear card
RTC	Supported	Supported
RPS	Not supported	Not supported
PoE	Not supported	Not supported
Maximum power consumption (100% throughput, full speed of fans)	114 W (without card)	124 W (without card)
Typical power consumption (30% of traffic load, tested according to ATIS standard)	88 W (without card)	101 W (without card)

Get more information:

Do you have any question about the S5731S-H24T4XC-A 02352YRG/02352YRG -001/02352YRG -003?

Contact us now via e-mail: info@hi-network.com



Datasheet

Specific Data Sheet:

Part Number	02352YRG/02352YRG -001/02352YRG -003
Model	S5731S-H24T4XC-A
Memory (RAM)	4 GB
Flash	1 GB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	57.73 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 448.0 mm (1.72 in. x 17.4 in. x 17.7 in.)
Weight (with packaging)	9.35 kg (20.61 lb)
Stack ports	10GE SFP+ ports on the front panel, or ports on the rear card
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	AC input: 100 V AC to 240 V AC, 50/60 Hz High-Voltage DC input: 240 V DC DC input: -48 V DC to -60 V DC
Maximum voltage range	AC input: 90 V AC to 290 V AC, 45 Hz to 65 Hz High-Voltage DC input: 190 V DC to 290 V DC DC input: -38.4 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	114 W (without card)
Typical power consumption (30% of traffic load, tested according to ATIS standard)	88 W (without card)
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 57.5 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223